
Colonna

Stehleuchten | 98 topLED 49 W DC 48 V | CRI 90

CZ157FBBMDI





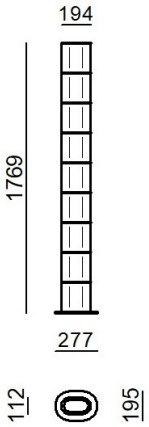

Technische Daten	
Designer	Gae Aulenti
Jahr der Verwirklichung	2026
Typ	Stehleuchten
Installationsposition	Boden
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	topLED
Optik	Diffuses
Light emission direction	upward
Lampe Nennleistung	49 W DC
Lichtstrom (Lichtquelle)	6170 lm
Frequency	50-60 Hz
Ähnlichste Farbtemperatur / Tone	2700 K
Farbwiedergabeindex	90 Ra
Gleichstrom/Gleichspannung	DC
Isolierklasse	2
IP	IP20
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Nein
C.V. - C.C. Converter	48 V Konverter enthalten
Leuchte dimmbar	PUSH DIM
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Steckdose	Type C
Kabellänge	3 m
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein

Oberfläche Oberfläche Gehäuse	
Material	Aluminium
Farbe	Text black (R9005)
Bearbeitungstyp	Lackierung

Oberfläche Oberfläche diffusor	
Material	PC
Bearbeitungstyp	Satinieren

Elektronik

012000658000
Push and Simply Dim Controller (1 art.)

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Stehleuchten | 98 topLED 49 W DC 48 V | CRI 90
CZ157FBBMDI

Single emission floor lamp for indoor application. The super warm white LED light source with a diffused light distribution is composed of 98 topled LEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 6170 lm, with a 125.9 lm/W nominal luminous efficacy.


The device body is made of aluminium and features a text black (r9005) finish, processed by means of coating; the diffuser is made of PC with a satin finishing treatment.


The ingress protection degree is IP20;

The total absorbed power is 49 W The power supply cable is included and features a 3 m length.

The device features protection class II and can be floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

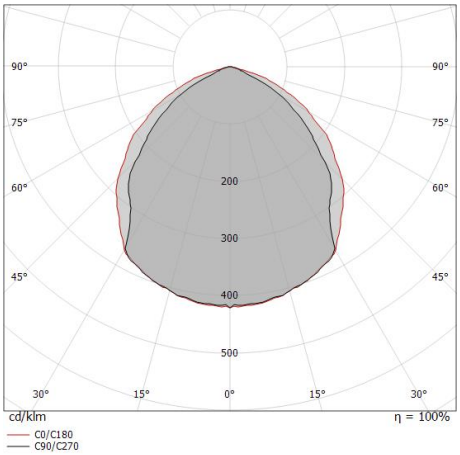

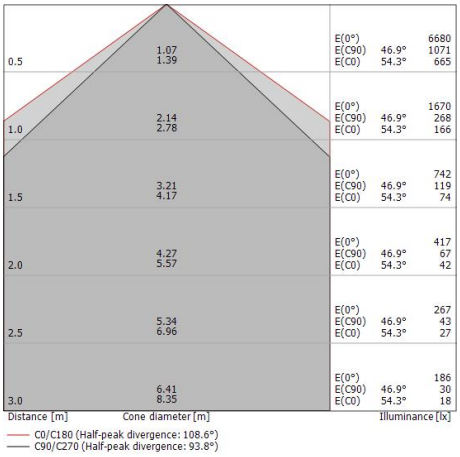

Energieeffizienzklasse
Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse D.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	64 %
Lichtstrom (Lichtquelle)	6170 lm
Leuchten Lichtstrom	3971 lm
Consumption	51 W
Leuchten Lichtausbeute	77 lm/W
Farbtemperatur	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	25°C

LED Life / Failure Ratio
L70 B10 C0 102000h (at Tj 115 Ta 25)
L90 B10 C0 55000h

UGR	
UGR axial	25.9
UGR transversal	28.5
X=4H | Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C90/C270	94°
Optik C0/C180	109°
Light distribution simmetry	Symmetrical 2 assis

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.