7GN3207P25

ENCLOSED ROTARY CAM SWITCH 7GN SERIES, ON-OFF SWITCH 3 POLES 32A IN PLASTIC ENCLOSURE 90X90MM WITH RED/YELLOW HANDLE

General characteristics

Switching diagram	07 - ON/OFF switch 3 poles
N° of elements	2
Mounting form	P25 - Plastic enclosure with red/yellow handle

Contact characteristics

Rated insulation voltage Ui			
	IEC/EN	V	690
	UL/CSA	V	600
Rated impulse withstand voltage Uimp		kV	6
Conventional free air thermal current Ith			
	IEC/EN	A	32
	UL/CSA	A	40
Rated operational voltage		V	480
Rated operational impulse voltage		kV	4
Maximum fuse size for short-circuit protection In (gG)			
	10kA	A	32
	15kA	A	32
	25kA	A	32
	50kA	A	32
Rated short time current Icw			
	1s	kA	800
Conductivity			10/5 mA/V
Operational current Ie IEC/EN			
AC1/AC21A			
		A	32
AC15			
	110V	A	25
	220/230V	A	20
	380/400V	A	10
	660/690V	A	2
Rated operational power in AC			
Three-phase AC-3			
	220/230V	kW	7.5
	380/440V	kW	11
	500/690V	kW	11
Single-phase AC-3			
	110V	kW	2.2
	220/230V	kW	4
	380/440V	kW	6.5
Three-phase AC23A			
	220/230V	kW	8
	380/440V	kW	15
	500/690V	kW	18.5
Single-phase AC23A			
	110V	kW	2.2
	220/230V	kW	4
	380/440V	kW	7.5
Rated operational current in DC			
DC21A			
	48V	A	32

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

7GN3207P25

ENCLOSED ROTARY CAM SWITCH 7GN SERIES, ON-OFF SWITCH 3 POLES 32A IN PLASTIC ENCLOSURE 90X90MM WITH RED/YELLOW HANDLE

		60V	A	32
		110V	A	6
		220V	A	0.9
	DC23A (poles in series)			
		24V	A	32 (1)
		48V	A	32 (2)
		60V	A	32 (3)
		110V	A	15 (3)
		220V	A	12 (4)
	DC13			
		24V	A	32
		48V	A	25
		60V	A	16
		110V	A	3
		220V	A	0.5
Power dissipation			W	1.5
Mechanical features				
Terminals screw				M4
Tightening torque for terminals max			Nm	1.2
Conductor size				
	AWG - Rigid cable			
		min	AWG	16
		Max	AWG	8
	AWG - Flexible cable			
		min	AWG	16
		Max	AWG	10
	Conductor size (IEC) - Flexible cable			
		min	mm²	1.5
		Max	mm²	4
	Conductor size (IEC) - Rigid cable			
		min	mm²	1.5
		Max	mm²	6
Mechanical life			cycles	5x10⁶
UL technical data				
Motor power for direct-on-line control				
	for three-phase motor			
		120V	HP	5
		240V	HP	10
		480V	HP	15
		600V	HP	15
	for single-phase motor			
		120V	HP	2
		240V	HP	5
Ambient conditions				
Temperature				
	Operating temperature			
		min	°C	-25
		max	°C	+55
	Storage temperature			
		min	°C	-40
		max	°C	+70
Resistance & Protection				
Frontal IP degree				IP65
Terminals IP degree				IP00

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

7GN3207P25


ENCLOSED ROTARY CAM SWITCH 7GN SERIES, ON-OFF SWITCH 3 POLES 32A IN PLASTIC ENCLOSURE 90X90MM WITH RED/YELLOW HANDLE

Dimensions

Series	Enclosure size	Number of elements		Dimensions										Cable entry	Protection degree
		L	L1	A	A1	C	C1	D	F	M	N	L	L1		
7GN12❶	75x75❶	1 - 2	3 - 4	75	75	50	64	4.5	19	14	28	57.5	79.8	4xPG13.5	IP65
7GN20❶		1 - 2	3 - 4												
7GN25❶		1	2 - 3												
7GN12❷	90x90	1 - 3	4 - 6	90	90	79	63	4.5	25	19	30	71.3	98.3	4xPG16	IP65
7GN20❷		1 - 3	4 - 6												
7GN25❷		1 - 2	3 - 4												
7GN32		1	2 - 3												
7GN40		1	2 - 3												
7GN12	110x110	1 - 4	5 - 8	110	110	98.4	83	4.5	32	21	39.5	85.5	119.5	4xPG21	IP65
7GN20		1 - 4	5 - 8												
7GN25		1 - 3	4 - 5												
7GN32❶		1 - 2	3 - 5												
7GN40❶		1 - 2	3 - 5												
7GN63		1 - 2	3 - 4												
7GN32❷	125x175	1 - 2	3 - 4	125	175	146	112	5.5	32	21	68	84.3	118.3	4xPG21 2xPG11	IP65
7GN40❷		1 - 2	3 - 4												
7GN63❶		1 - 2	3 - 4												
7GN125		1	2												
7GN32	198x248	–	1 - 7	198	248	190-210	140-180	5.5	32	35	104	–	166.5	6xPG16-21-29	IP65
7GN40		–	1 - 7												
7GN63❷		–	1 - 6												
7GN125❶❷		–	1 - 4												

❶ Standard dimensions for cam switch in plastic enclosure with black handle (P).
❷ DStandard dimensions for cam switch in plastic enclosure with red/yellow handle padlockable in 0 (P25).

Wiring diagrams

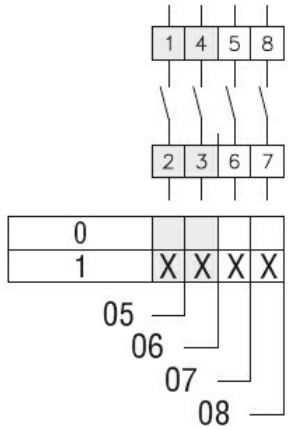

Certifications and compliance

Compliance

	IEC/EN/BS 60947-1
	IEC/EN/BS 60947-3
	IEC/EN/BS 60947-5-1

Certificates

	EAC

ETIM classification

ETIM 8.0	EC001029 - Selector switch, complete

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding