8LT7FLB6

FLASH MODULE. Ø70MM. WITH 4-JOULE XENON BULB, BLUE, 24VAC/DC





Product designation			Signal tower Ø70mm/2.75"
Product type designation			8TL7FL - Light mudules
General characteristics			
Diameter		mm - inch	70 / 2.75
Supply voltage (AC)		V	24
Supply voltage (DC)		V	24
Colour			Blue
IEC degree of protection			IP65
Light consumption per module (AC)		mA	135
Light consumption per module (DC)		mA	75
Sound module consumption (AC)		mA	135
Sound module consumption (DC)		mA	75
Mechanical features			
Weight		g	92
Ambient conditions			
Temperature			
Operating temperature			
	min	°C	-20
	max	°C	+50
Dimensions			

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding


8LT7FLB6

FLASH MODULE. Ø70MM. WITH 4-JOULE XENON BULB, BLUE, 24VAC/DC

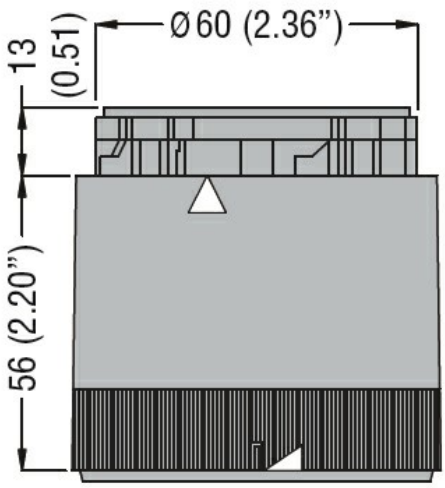

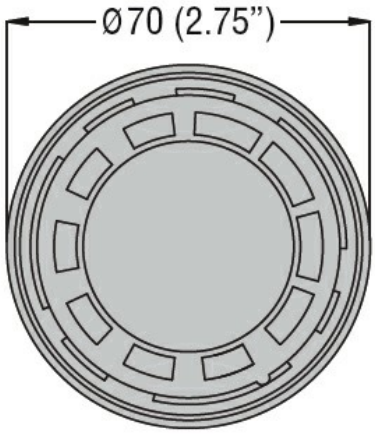

Wiring diagrams

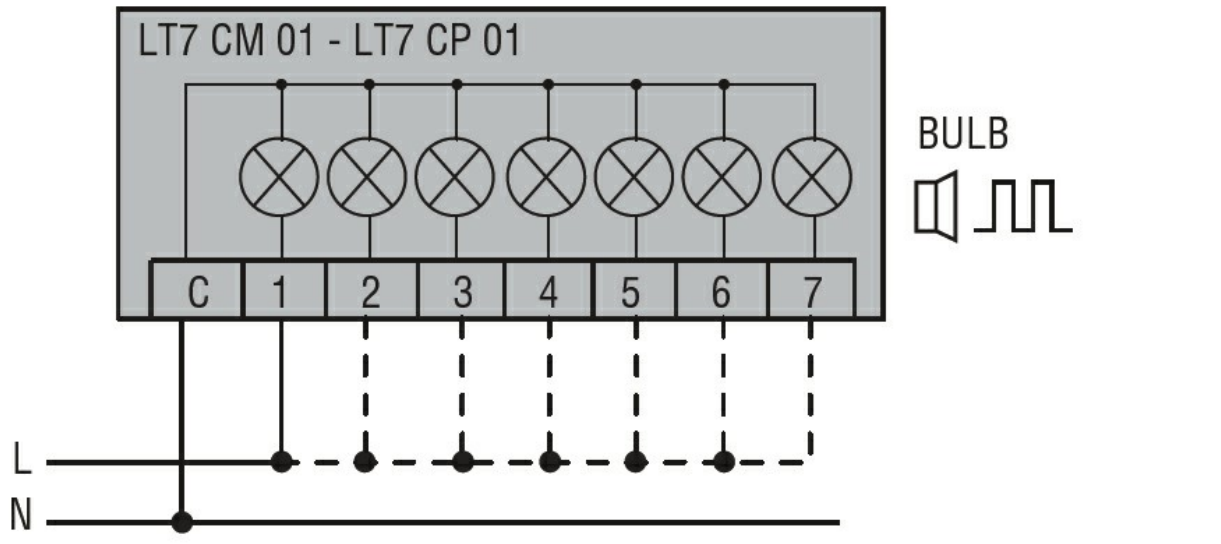

Connect terminals C and 1 as indicated to power the first module.
If other modules are fitted, the respective terminals must be connected accordingly.

Certifications and compliance

Compliance

CSA C22.2 n° 14

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

	IEC/EN 60947-1
	IEC/EN 60947-5-1
	UL508
Certificates	
	cULus
	EAC

ETIM classification

ETIM 8.0	EC000232 - Optical module for signal tower

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding