
8LT7FLE8


MODUŁ ŚWIATŁA BŁYSKOWEGO, Ø70MM, BIAŁY, 115VAC, ŻARÓWKA XENON



Charakterystyka ogólna			
Średnica		mm - inch	70 / 2.75
Napięcie zasilania (AC)		V	110…120
Kolor			Biały
Stopień ochrony według IEC			IP65
Zużycie światła na moduł (AC)		mA	20
Pobór prądu modułów świetlnych (DC)		mA	20
Zużycie modułu dźwiękowego (AC)		mA	20
Pobór prądu modułu dźwiękowego (DC)		mA	20
Właściwości mechaniczne			
Masa		g	92
Warunki otoczenia			
Temperatura			
	Temperatura pracy		
	min.	°C	-20
	maks.	°C	+50


Wymiary

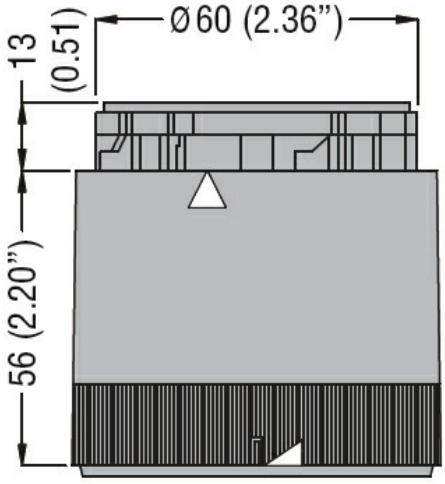

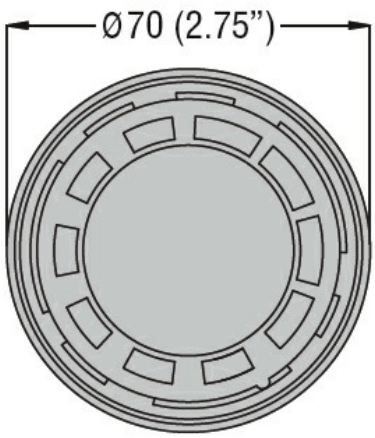

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

Schemat połączeń elektrycznych

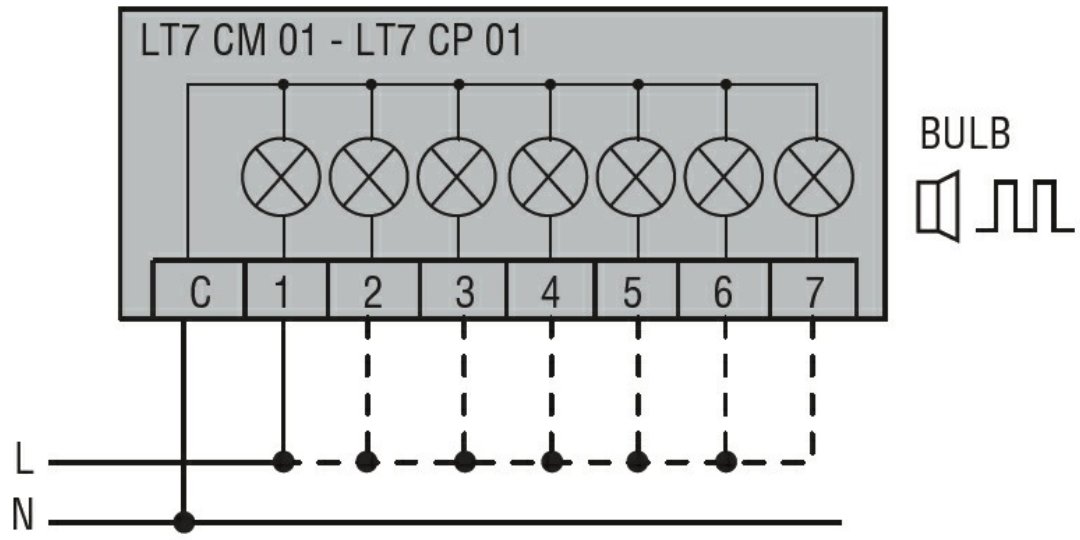

Connect terminals C and 1 as indicated to power the first module.
If other modules are fitted, the respective terminals must be connected accordingly.

Certyfikaty i zgodność

Zgodność	
	CSA C22.2 n° 14
	IEC/EN 60947-1
	IEC/EN 60947-5-1
	UL508
Certyfikaty	
	cULus
	EAC

Klasyfikacja ETIM

ETIM 8,0	EC000232 - Moduł świetlny dla kolumny sygnalizacyjnej

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding