
8LT7FLM1


MODUŁ ŚWIATŁA BŁYSKOWEGO, Ø70MM, POMARAŃCZOWY, 240VAC, ŻARÓWKA XENON



Charakterystyka ogólna		
Średnica	mm - inch	70 / 2.75
Napięcie zasilania (AC)	V	230…240
Kolor		Pomarańczowy
Stopień ochrony według IEC		IP65
Zużycie światła na moduł (AC)	mA	15
Pobór prądu modułów świetlnych (DC)	mA	15
Zużycie modułu dźwiękowego (AC)	mA	15
Pobór prądu modułu dźwiękowego (DC)	mA	15
Właściwości mechaniczne		
Masa	g	92
Warunki otoczenia		
Temperatura		
Temperatura pracy		
min.	°C	-20
maks.	°C	+50

Wymiary

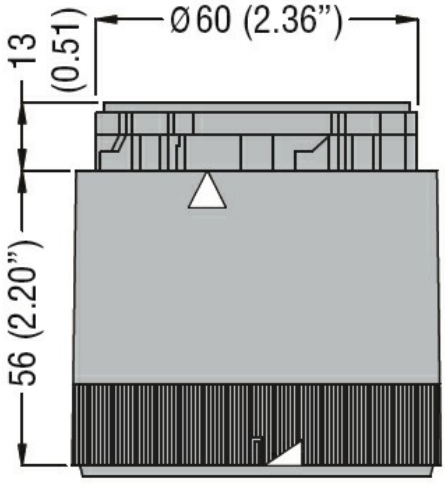

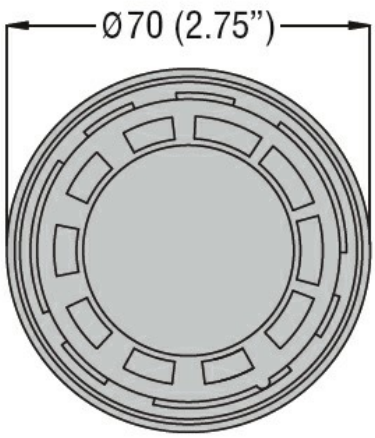


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

8LT7FLM1

MODUŁ ŚWIATŁA BŁYSKOWEGO, Ø70MM, POMARAŃCZOWY, 240VAC, ŻARÓWKA XENON

Schemat połączeń elektrycznych

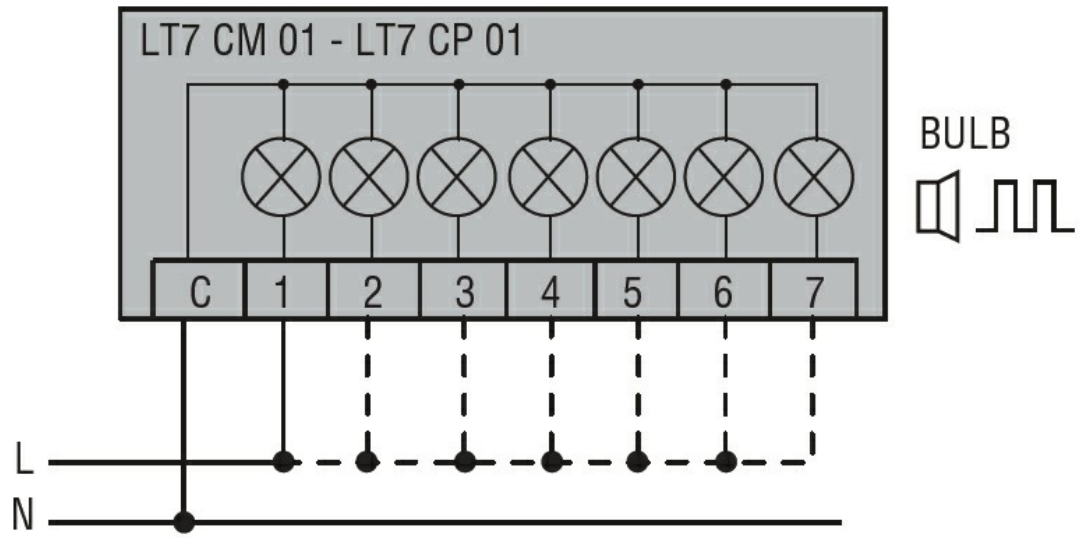

Connect terminals C and 1 as indicated to power the first module.
If other modules are fitted, the respective terminals must be connected accordingly.

Certyfikaty i zgodność

Zgodność	
	CSA C22.2 n° 14
	IEC/EN 60947-1
	IEC/EN 60947-5-1
	UL508
Certyfikaty	
	cULus
	EAC

Klasyfikacja ETIM

ETIM 8,0	EC000232 - Moduł świetlny dla kolumny sygnalizacyjnej

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding