KND1L20

LIMIT SWITCH, K SERIES, ROLLER SIDE PUSH LEVER, 2 SIDE CABLE ENTRY. DIMENSIONS COMPATIBLE TO EN 50047, METAL BODY, CONTACTS 2NO SLOW ACTION. PLASTIC ROLLER




General characteristics				
Material				
		Housing		Aluminium-zinc alloy
		Roller		Metal
Contact characteristics				
Type of contact				2NC Slow action
Thermal current Ith			A	10
IEC/EN 60947-5-1 designation				A300 Q300
Rated insulation voltage Ui			V	440
Rated impulse withstand voltage Uimp			kV	4
Short-circuit protection with fuse			Class/A	10 gG/SC QUICK FUSE
Switching speed				
		min	m/s	0.5
		max	m/s	1.5
IEC Conventional free air thermal current Ith ≤ 40°C			A	10
Resistance per pole (average value)			mΩ	<10
Mechanical features				
Operating head fixing				Locking bayonet insert
Operating torque				
			N	6
			lb	1.34
Tightening torque (Max)				
	Switch fixing			
			Nm	2.5
			lbin	22.1
	Contact terminals			
			Nm	0.8
			lbin	7
	Body lid screw fixing			
			Nm	0.8
			lbin	7
Conductor section				
	AWG/Kcmil			
		min		16
		max		14
	IEC			
		min	mm²	1.5
		max	mm²	2.5
Cable connection				Self-releasing screw terminal
Cable entry				M20 on the sides
Operations				
Mechanical life			cycles	<10000000


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

Mechanical operation			cycles/h	3600
Ambient conditions				
Temperature				
	Operating temperature			
		min	°C	-25
		max	°C	+70
	Storage temperature			
		min	°C	-40
		max	°C	+70
Resistance & Protection				
IP degree				
		Terminals		IP20
		Body housing		IP65
Pollution degree				3

Dimensions

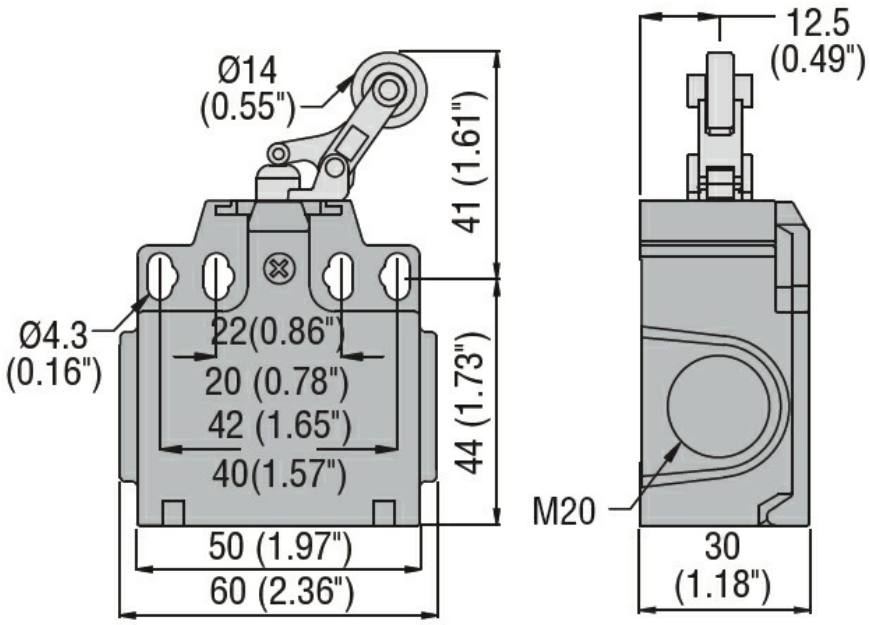

Wiring diagrams

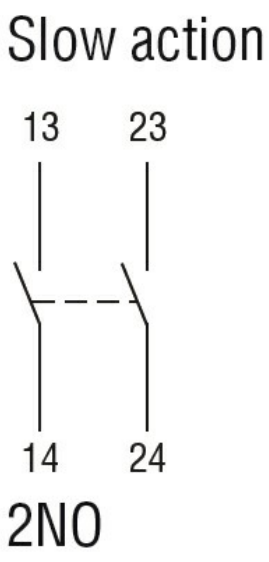

Certifications and compliance

Compliance

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

	CSA C22.2 n° 14
	EN 50047
	IEC/EN 60204-1
	IEC/EN 60947-1
	IEC/EN 60947-5-1
	UL508
Certificates	
	CCC
	cULus
	EAC

ETIM classification

ETIM 8.0	EC000030 - End switch

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding