LPCS350R622E

PLASTIKOWY PRZEŁĄCZNIK Ø22MM SERII PLATINUM, Z KLUCZEM, 3 POZYCJE, 1 > 0 - 2. SPECJALNY KOD KLUCZA. WYJĘCIE KLUCZA W POZYCJI 0



Charakterystyka ogólna

Kolor			Czarny
Typ pozycji			1 > 0 - 2, wyjęcie klucza w pozycji 0
Materiał			Poliamid
Stopień ochrony według IEC			IP66, IP67 oraz IP69K

Właściwości mechaniczne

Trwałość mechaniczna		cycles	1000000
Adapter do montażu			LPXAU120
Masa		g	60


Dane techniczne UL

Stopień ochrony według UL			Typ 1, 2, 3R, 4, 4X, 12, 12K

Warunki otoczenia

Temperatura			
	Temperatura pracy		
		min. °C	-25
		maks. °C	+70
	Temperatura składowania		
		min. °C	-40
		maks. °C	+85

Wymiary

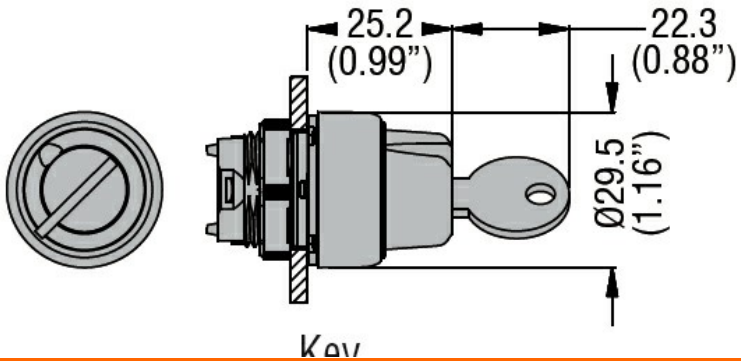

Certyfikaty i zgodność

Zgodność	
	CSA C22.2 n° 14
	IEC/EN/BS 60947-1
	IEC/EN/BS 60947-5-1
	UL508
Certyfikaty	
	CCC
	cULus

Klasyfikacja ETIM

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

ETIM 8,0

EC000222 - Napęd przełącznika obrotowego

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding