# LTN50ML1

BLINKING OR STEADY LIGHT MODULE Ø50MM. INTEGRATED LED LAMP, ORANGE



## General characteristics

| | | | |
|---|---|---|---|
| Diameter | | mm - inch | 50 / 1.97 |
| Colour | | | Orange |
| IEC degree of protection | | | IP65 |
| Power consumption | | VA | 1.2 |

## Mechanical features


| | | | |
|---|---|---|---|
| Weight | | g | 37 |

## Ambient conditions

Temperature

| | | | |
|---|---|---|---|
| | Operating temperature | | |
| | | min | °C -30 |
| | | max | °C +50 |

## Dimensions

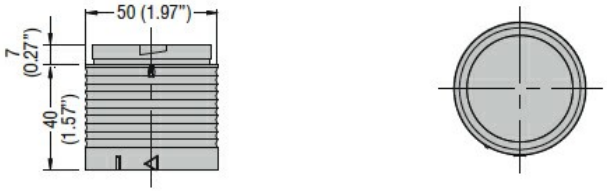


## Certifications and compliance

Compliance

| |
|---|
| CSA C22.2 n° 14 |
| IEC/EN/BS 60947-1 |
| IEC/EN/BS 60947-5-1 |
| UL508 |

Certificates

cULus

## ETIM classification

| | |
|---|---|
| ETIM 8.0 | EC000232 - Optical module for signal tower |


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding