
LVFSN1B15

PRZEŁĄCZNIK PŁYWAKOWY DO WODY BRUDNEJ I ŚCIEKÓW, PRZEWÓD Z NEOPRENU O DŁUGOŚCI 15M



Przeciwwagi			
Przeciwwaga			Wewnętrzny
Kąt aktywacyjny			15°
Wyjścia przekaźnikowe			
Liczba przekaźników		Nr.	1
Układ zestyków			1 zestyk przełączny
Znamionowe napięcie robocze AC (IEC)		VAC	250
Klasyfikacja zestyków			AC1 10A 250VAC AC15 4A 250VAC
Podłączenia			
Maksymalna długość kabla		m / ft	15
Warunki otoczenia			
Temperatura			
	Temperatura pracy		
	min.	°C	0
	maks.	°C	+50
	Temperatura składowania		
	min.	°C	-20
	maks.	°C	+80
Maksymalne ciśnienie robocze		bar	5
Maksymalna głębokość instalacji		m	50
Obudowa			
Materiał przewodu			Neoprene H07 RN-F3X1
Materiał obudowy pływaka			Polipropylen
Stopień ochrony według IEC			IP68
Masa		g	2460

Wymiary

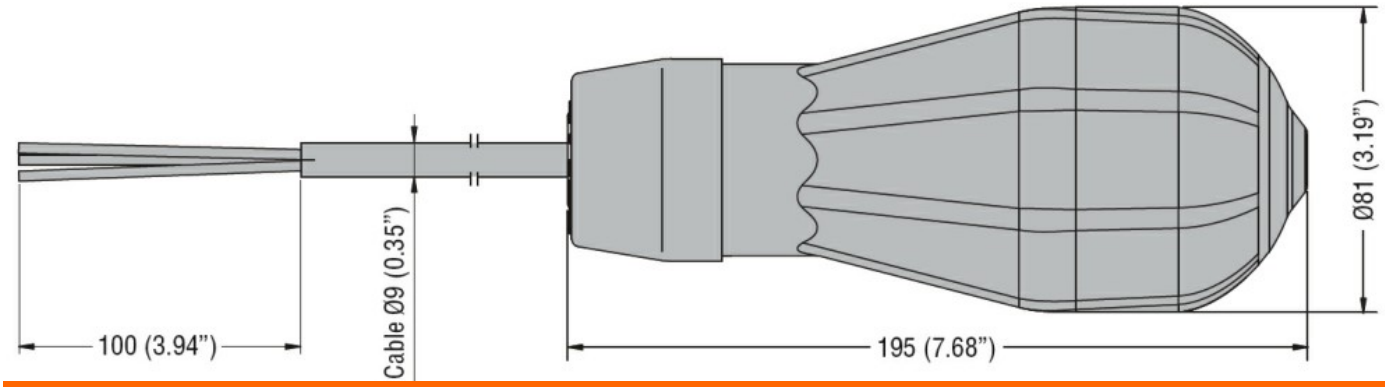

Certyfikaty i zgodność

Zgodność

IEC/EN 60730-1

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

	IEC/EN 60730-2-15
Certyfikaty	
	TÜV-SUD

Klasyfikacja ETIM

ETIM 8,0	EC001447 - Przekaźnik kontroli poziomu (cieczy)

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding