7GN2591O48

ROTARY CAM SWITCH 7GN SERIES, ON-OFF SWITCH 2 POLES 25A, MODULAR SERVICE COVER FOR 35MM DIN REAIL MOUNTING WITH BLACK HANDLE, FRONT PLATE 45X54MM



General characteristics

Switching diagram			91 - ON/OFF switch 2 poles
N° of elements			1
Mounting form			O48 - Modular service cover for 35mm din rail mounting with black handle

Contact characteristics

Rated insulation voltage Ui			
	IEC/EN	V	690
	UL/CSA	V	600
Rated impulse withstand voltage Uimp		kV	6
Conventional free air thermal current Ith			
	IEC/EN	A	25
	UL/CSA	A	30
Rated operational voltage		V	480
Rated operational impulse voltage		kV	4
Maximum fuse size for short-circuit protection In (gG)			
	10kA	A	25
	15kA	A	25
	25kA	A	25
Rated short time current Icw			
	1s	kA	400
Conductivity			10/5 mA/V
Operational current Ie IEC/EN			
AC1/AC21A			
		A	25
AC15			
	110V	A	16
	220/230V	A	12
	380/400V	A	8
	660/690V	A	2
Rated operational power in AC			
Three-phase AC-3			
	220/230V	kW	5.5
	380/440V	kW	7.5
	500/690V	kW	7.5
Single-phase AC-3			
	110V	kW	1.5
	220/230V	kW	3
	380/440V	kW	5.5
Three-phase AC23A			
	220/230V	kW	6.5
	380/440V	kW	11

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

		500/690V	kW	11
	Single-phase AC23A			
		110V	kW	1.5
		220/230V	kW	3.7
		380/440V	kW	5.5
Rated operational current in DC				
	DC21A			
		48V	A	25
		60V	A	25
		110V	A	4
		220V	A	0.7
	DC23A (poles in series)			
		24V	A	25 (1)
		48V	A	25 (2)
		60V	A	25 (3)
		110V	A	12 (3)
		220V	A	10 (4)
	DC13			
		24V	A	25
		48V	A	20
		60V	A	16
		110V	A	1.5
		220V	A	0.4
Power dissipation			W	1.1
Mechanical features				
Terminals screw				M3.5
Tightening torque for terminals max			Nm	0.8
Conductor size				
	AWG - Rigid cable			
		min	AWG	20
		Max	AWG	10
	AWG - Flexible cable			
		min	AWG	20
		Max	AWG	12
	Conductor size (IEC) - Flexible cable			
		min	mm²	0.5
		Max	mm²	4
	Conductor size (IEC) - Rigid cable			
		min	mm²	0.5
		Max	mm²	4
Mechanical life			cycles	$5x10^6$
UL technical data				
Motor power for direct-on-line control				
	for three-phase motor			
		120V	HP	3
		240V	HP	5
		480V	HP	10
		600V	HP	15
	for single-phase motor			
		120V	HP	1.5
		240V	HP	3
Ambient conditions				
Temperature				
	Operating temperature			

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

7GN2591O48


ROTARY CAM SWITCH 7GN SERIES, ON-OFF SWITCH 2 POLES 25A, MODULAR SERVICE COVER FOR 35MM DIN REAIL MOUNTING WITH BLACK HANDLE, FRONT PLATE 45X54MM

	min	°C	-25
	max	°C	+55
Storage temperature			
	min	°C	-40
	max	°C	+70

Resistance & Protection


Frontal IP degree	IP40
Terminals IP degree	IP00

Dimensions

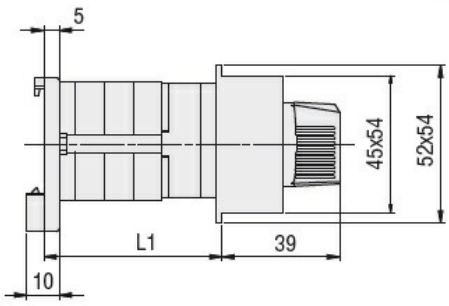

Series	L1		
	1	2	3
7GN12	38.1	47.8	57.5
7GN20	38.1	47.8	57.5
7GN25	42.5	56.1	69.7

Wiring diagrams

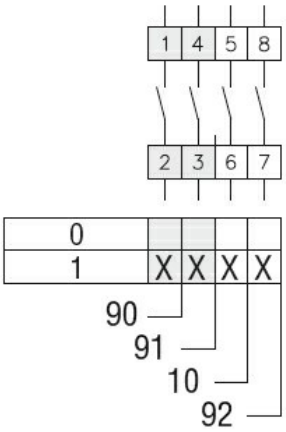

Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN/BS 60947-1
IEC/EN/BS 60947-3
IEC/EN/BS 60947-5-1
UL60947-4-1

Certificates

cCSAus
EAC
UL

ETIM classification

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

ETIM 8.0

EC001029 - Selector switch, complete

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding