7GN6313P

ENCLOSED ROTARY CAM SWITCH 7GN SERIES, DAHLANDER MOTOR CONTROL SWITCH 1-0-2, 63A IN PLASTIC ENCLOSURE 125X175MM WITH BLACK HANDLE

General characteristics

Switching diagram			13 - Dahlander motor control switch 1-0-2
N° of elements			4
Mounting form			P - Plastic enclosure with black handle

Contact characteristics

Rated insulation voltage Ui			
	IEC/EN	V	690
	UL/CSA	V	600
Rated impulse withstand voltage Uimp		kV	6
Conventional free air thermal current Ith			
	IEC/EN	A	63
	UL/CSA	A	60
Rated operational voltage		V	480
Rated operational impulse voltage		kV	4
Maximum fuse size for short-circuit protection In (gG)			
	10kA	A	63
	15kA	A	63
	25kA	A	63
	50kA	A	63
	63kA	A	63
Rated short time current Icw			
	1s	kA	1600
Conductivity			10/5 mA/V
Operational current Ie IEC/EN			
AC1/AC21A			
		A	63
AC15			
	110V	A	32
	220/230V	A	25
	380/400V	A	15
	660/690V	A	4
Rated operational power in AC			
Three-phase AC-3			
	220/230V	kW	11
	380/440V	kW	18.5
	500/690V	kW	18.5
Single-phase AC-3			
	110V	kW	3.7
	220/230V	kW	6.5
	380/440V	kW	11.5
Three-phase AC23A			
	220/230V	kW	12.5
	380/440V	kW	30
	500/690V	kW	30
Single-phase AC23A			
	110V	kW	3.7
	220/230V	kW	7.5
	380/440V	kW	12.5
Rated operational current in DC			

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

	DC21A			
		48V	A	63
		60V	A	50
		110V	A	8
		220V	A	1
	DC23A (poles in series)			
		24V	A	50 (1)
		48V	A	50 (2)
		60V	A	50 (3)
		110V	A	25 (3)
		220V	A	15 (4)
	DC13			
		24V	A	63
		48V	A	40
		60V	A	28
		110V	A	3.3
Power dissipation			W	3.4
Mechanical features				
Terminals screw				M5
Tightening torque for terminals max			Nm	2
Conductor size				
	AWG - Rigid cable			
		min	AWG	14
		Max	AWG	6
	AWG - Flexible cable			
		min	AWG	14
		Max	AWG	8
	Conductor size (IEC) - Flexible cable			
		min	mm²	2.5
		Max	mm²	10
	Conductor size (IEC) - Rigid cable			
		min	mm²	2.5
		Max	mm²	16
Mechanical life			cycles	5x10⁶
UL technical data				
Motor power for direct-on-line control				
	for three-phase motor			
		120V	HP	7.5
		240V	HP	15
		480V	HP	25
		600V	HP	25
	for single-phase motor			
		120V	HP	3
		240V	HP	10
Ambient conditions				
Temperature				
	Operating temperature			
		min	°C	-25
		max	°C	+55
	Storage temperature			
		min	°C	-40
		max	°C	+70
Resistance & Protection				
Frontal IP degree				IP65

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

7GN6313P

ENCLOSED ROTARY CAM SWITCH 7GN SERIES, DAHLANDER MOTOR CONTROL SWITCH 1-0-2, 63A IN PLASTIC ENCLOSURE 125X175MM WITH BLACK HANDLE


Terminals IP degree IP00

Dimensions

Series	Enclosure size	Number of elements		Dimensions										Cable entry	Protection degree
		L	L1	A	A1	C	C1	D	F	M	N	L	L1		
7GN12❶	75x75❸	1 - 2	3 - 4	75	75	50	64	4.5	19	14	28	57.5	79.8	4xPG13.5	IP65
7GN20❶		1 - 2	3 - 4												
7GN25❶		1	2 - 3												
7GN12❷	90x90	1 - 3	4 - 6	90	90	79	63	4.5	25	19	30	71.3	98.3	4xPG16	IP65
7GN20❷		1 - 3	4 - 6												
7GN25❷		1 - 2	3 - 4												
7GN32		1	2 - 3												
7GN40		1	2 - 3												
7GN12	110x110	1 - 4	5 - 8	110	110	98.4	83	4.5	32	21	39.5	85.5	119.5	4xPG21	IP65
7GN20		1 - 4	5 - 8												
7GN25		1 - 3	4 - 5												
7GN32❶		1 - 2	3 - 5												
7GN40❶		1 - 2	3 - 5												
7GN63		1 - 2	3 - 4												
7GN32❷	125x175	1 - 2	3 - 4	125	175	146	112	5.5	32	21	68	84.3	118.3	4xPG21 2xPG11	IP65
7GN40❷		1 - 2	3 - 4												
7GN63❶		1 - 2	3 - 4												
7GN125		1	2												
7GN32	198x248	–	1 - 7	198	248	190-210	140-180	5.5	32	35	104	–	166.5	6xPG16-21-29	IP65
7GN40		–	1 - 7												
7GN63❷		–	1 - 6												
7GN125❶❷		–	1 - 4												

❶ Standard dimensions for cam switch in plastic enclosure with black handle (P).
❷ DStandard dimensions for cam switch in plastic enclosure with red/yellow handle padlockable in 0 (P25).

Wiring diagrams

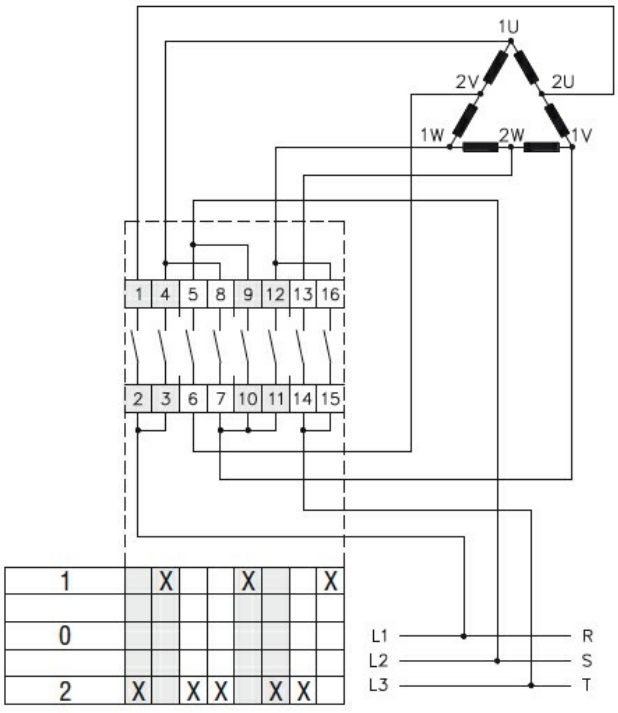

Certifications and compliance

Compliance

IEC/EN/BS 60947-1
IEC/EN/BS 60947-3
IEC/EN/BS 60947-5-1

Certificates

EAC

ETIM classification

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

ETIM 8.0	EC001029 - Selector switch, complete

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding