8LT73B9B

STEADY LIGHT MULTICOLORED LIGHT MODULE. Ø70MM. BUILT-IN LED CIRCUIT. BLUE, ORANGE, RED, 24VDC





General characteristics				
Diameter			mm - inch	70 / 2.75
Supply voltage (DC)			V	24±10%
Colour				Blue, orange, red
IEC degree of protection				IP65
Light consumption per module (DC)			mA	90
Sound module consumption (DC)			mA	90
Sound intensity			dB	90
Mechanical features				
Tightening torque for terminals max			Nm	0.5
Terminals screw				Screw clamp terminals
Conductor section				
	AWG/Kcmil			
		max		16
	IEC			
		max	mm²	1.5
Weight			g	90
Ambient conditions				
Temperature				
	Operating temperature			
		min	°C	-20
		max	°C	+50
Dimensions				

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding


8LT73B9B

STEADY LIGHT MULTICOLORED LIGHT MODULE. Ø70MM. BUILT-IN LED CIRCUIT. BLUE, ORANGE, RED, 24VDC

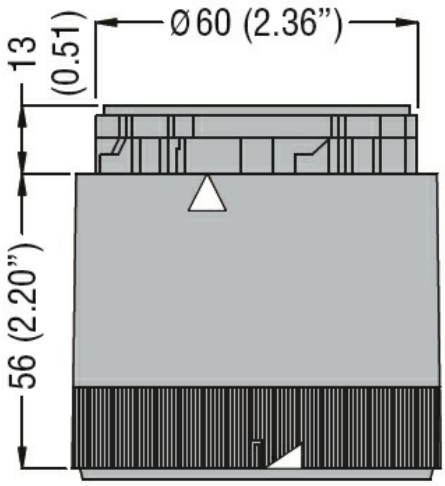

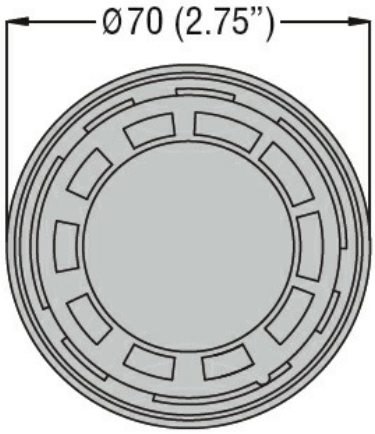

Wiring diagrams

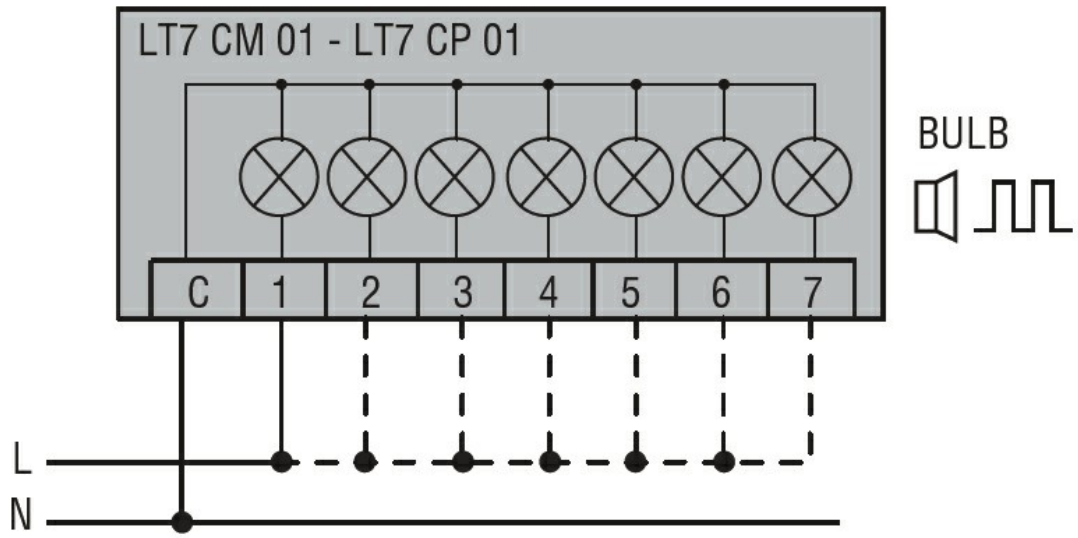

Connect terminals C and 1 as indicated to power the first module. If other modules are fitted, the respective terminals must be connected accordingly.

Certifications and compliance

Compliance

CSA C22.2 n° 14

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

	IEC/EN 60947-1
	IEC/EN 60947-5-1
	UL508
Certificates	
	cULus
	EAC

ETIM classification

ETIM 8.0	EC000232 - Optical module for signal tower

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding