

8LT7FLM6

FLASH MODULE. Ø70MM. WITH 4-JOULE XENON BULB, BLUE, 230...240VAC



General characteristics			
Diameter		mm - inch	70 / 2.75
Supply voltage (AC)		V	230…240
Colour			Blue
IEC degree of protection			IP65
Light consumption per module (AC)		mA	15
Light consumption per module (DC)		mA	15
Sound module consumption (AC)		mA	15
Sound module consumption (DC)		mA	15
Mechanical features			
Weight		g	92
Ambient conditions			
Temperature			
Operating temperature			
	min	°C	-20
	max	°C	+50
Dimensions			

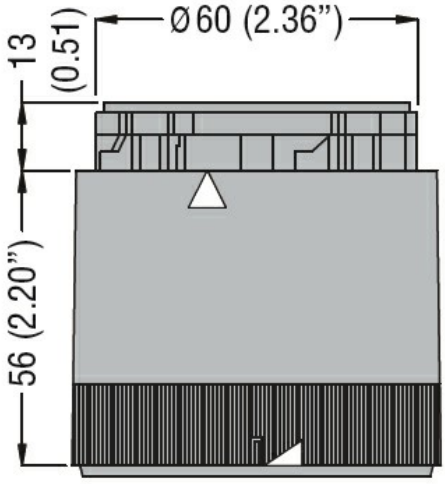

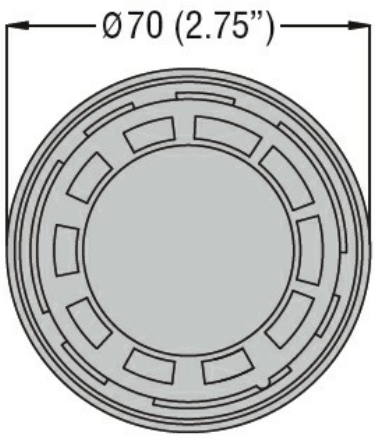


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

8LT7FLM6

FLASH MODULE. Ø70MM. WITH 4-JOULE XENON BULB, BLUE, 230...240VAC

Wiring diagrams

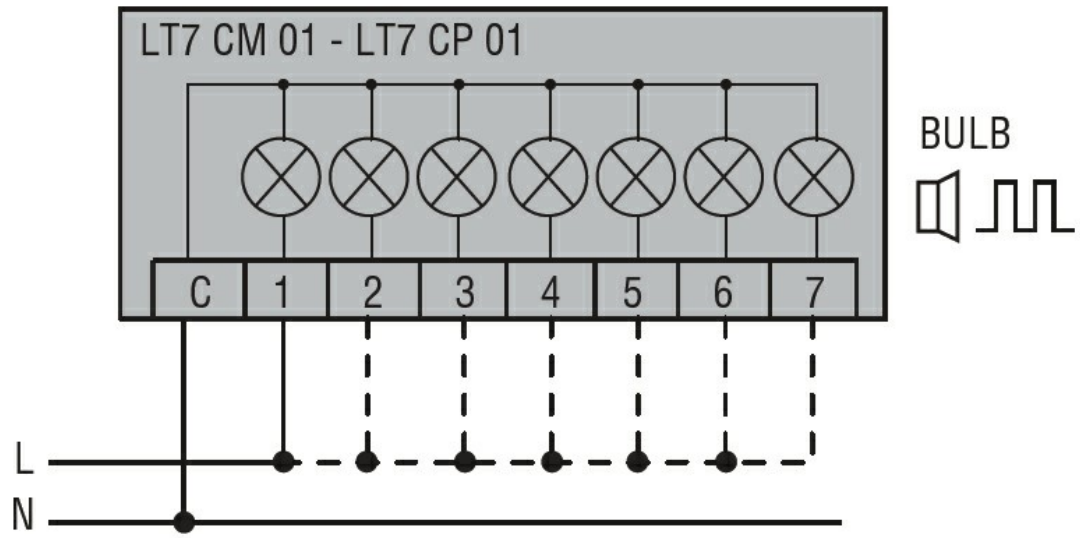

Connect terminals C and 1 as indicated to power the first module.
If other modules are fitted, the respective terminals must be connected accordingly.

Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN 60947-1
IEC/EN 60947-5-1
UL508

Certificates

cULus
EAC

ETIM classification

ETIM 8.0	EC000232 - Optical module for signal tower

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding