
# 8LT7GLE6


BLINKING LIGHT MODULE. Ø70MM. BA15D FITTING, BLUE, 110...120VAC



| General characteristics | | | |
|---|---|---|---|
| Diameter | | mm - inch | 70 / 2.75 |
| Supply voltage (AC) | | V | 110…120 |
| Colour | | | Blue |
| IEC degree of protection | | | IP65 |
| **Mechanical features** | | | |
| Weight | | g | 83 |
| **Ambient conditions** | | | |
| Temperature | | | |
| | Operating temperature | | |
| | min | °C | -20 |
| | max | °C | +50 |

## Dimensions

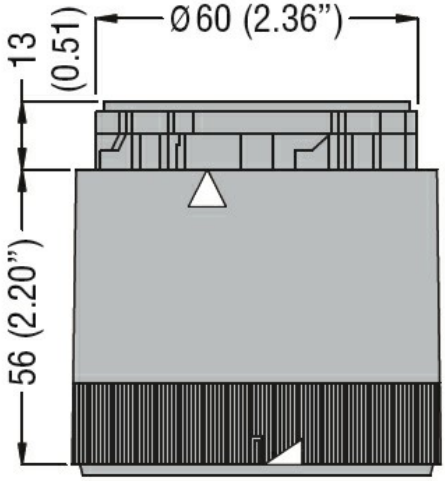

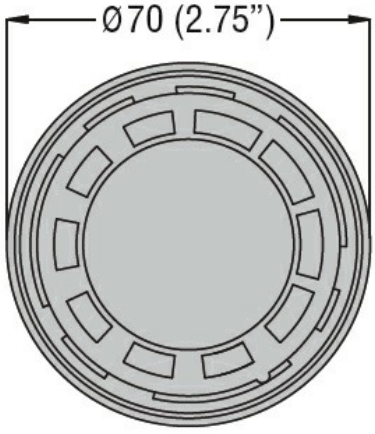




## Wiring diagrams


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

# 8LT7GLE6

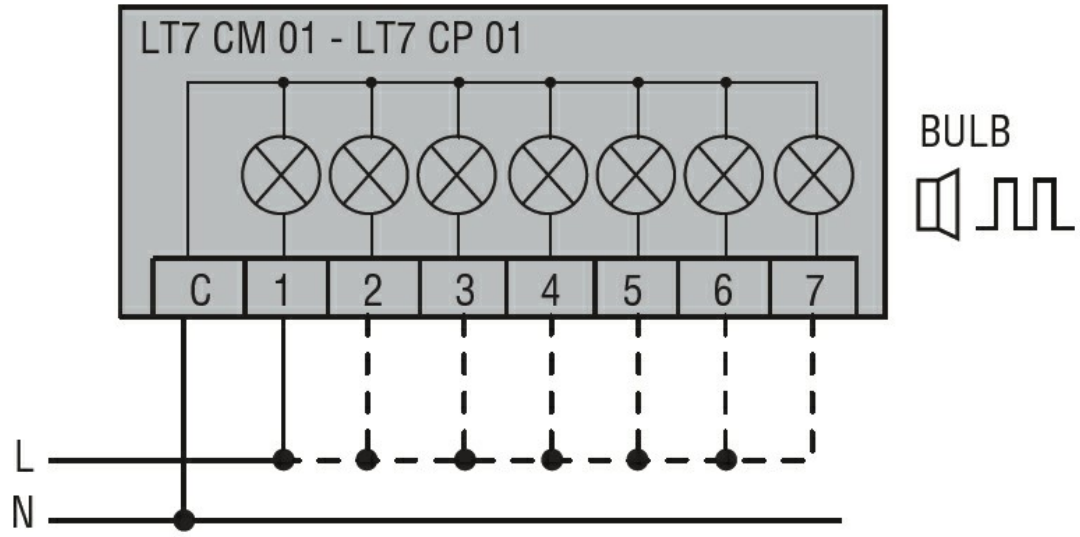BLINKING LIGHT MODULE. Ø70MM. BA15D FITTING, BLUE, 110...120VAC




Connect terminals C and 1 as indicated to power the first module.
If other modules are fitted, the respective terminals must be connected accordingly.

## Certifications and compliance

| | |
|---|---|
| Compliance | |
| | CSA C22.2 n° 14 |
| | IEC/EN 60947-1 |
| | IEC/EN 60947-5-1 |
| | UL508 |
| Certificates | |
| | cULus |
| | EAC |

## ETIM classification

| | |
|---|---|
| ETIM 8.0 | EC000232 - Optical module for signal tower |


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding