# BF0004D060

CONTROL RELAY WITH DC COIL, 60VDC, 4NC



| | | | |
|---|---|---|---|
| **Contact characteristics** | | | |
| Number of poles | | Nr. | 4 |
| Rated insulation voltage Ui IEC/EN | | V | 690 |
| Rated impulse withstand voltage Uimp | | kV | 6 |
| Operational frequency | | | |
| | min | Hz | 25 |
| | max | Hz | 400 |
| IEC Conventional free air thermal current Ith ≤ 40°C | | A | 10 |
| Protection fuse | | | |
| | gG (IEC) | A | 25 |
| Tightening torque for terminals | | | |
| | min | Nm | 1.5 |
| | max | Nm | 1.8 |
| | min | lbin | 1.1 |
| | max | lbin | 1.5 |
| Tightening torque for coil terminal | | | |
| | min | Nm | 0.8 |
| | max | Nm | 1 |
| | min | lbin | 0.8 |
| | max | lbin | 0.74 |
| Max number of wires simultaneously connectable | | Nr. | 2 |
| Conductor section | | | |
| AWG/Kcmil | | | |
| | max | | 10 |
| Flexible w/o lug conductor section | | | |
| | min | mm² | 1 |
| | max | mm² | 6 |
| Flexible c/w lug conductor section | | | |
| | min | mm² | 1 |
| | max | mm² | 4 |
| Flexible with insulated spade lug conductor section | | | |
| | min | mm² | 1 |
| | max | mm² | 4 |
| Power terminal protection according to IEC/EN 60529 | | | IP20 when properly wired |
| **Mechanical features** | | | |
| Operating position | | | |
| | normal | | Vertical plan |
| | allowable | | ±30° |
| Fixing | | | Screw / DIN rail 35mm |
| Weight | | g | 496 |
| **Auxiliary contact characteristics** | | | |
| Thermal current Ith | | A | 10 |
| IEC/EN 60947-5-1 designation | | | A600 - P600 |


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

| | | | | |
|---|---|---|---|---|
| Operating current AC15 | | | | |
| | | 230V | A | 3 |
| | | 400V | A | 1.9 |
| | | 500V | A | 1.4 |
| Operating current DC12 | | | | |
| | | 110V | A | 5.7 |
| Operating current DC13 | | | | |
| | | 24V | A | 5.7 |
| | | 48V | A | 2.9 |
| | | 60V | A | 2.3 |
| | | 110V | A | 1.25 |
| | | 125V | A | 1.1 |
| | | 220V | A | 0.55 |
| | | 600V | A | 0.2 |
| **Operations** | | | | |
| Mechanical life | | | cycles | 20000000 |
| **Safety related data** | | | | |
| Performance level B10d according to EN/ISO 13489-1 | | | | |
| | | mechanical load | cycles | 20000000 |
| EMC compatibility | | | | yes |
| **DC coil operating** | | | | |
| DC rated control voltage | | | V | 60 |
| DC operating voltage | | | | |
| | pick-up | | | |
| | | min | %Us | 70 |
| | | max | %Us | 125 |
| | drop-out | | | |
| | | min | %Us | 10 |
| | | max | %Us | 40 |
| Average coil consumption ≤20°C | | | | |
| | | in-rush | W | 5.4 |
| | | holding | W | 5.4 |
| **Max cycles frequency** | | | | |
| Mechanical operation | | | cycles/h | 3600 |
| **Operating times** | | | | |
| Average time for Us control | | | | |
| | in DC | | | |
| | | Closing NO | | |
| | | min | ms | 54 |
| | | max | ms | 66 |
| | | Opening NO | | |
| | | min | ms | 14 |
| | | max | ms | 17 |
| | | Closing NC | | |
| | | min | ms | 24 |
| | | max | ms | 30 |
| | | Opening NC | | |
| | | min | ms | 47 |
| | | max | ms | 57 |
| **UL technical data** | | | | |
| Rated operational voltage AC (UL) | | | V | 600 |
| General USE | | | | |
| | Auxiliary contacts | | | |
| | | AC current | A | 10 |


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

| | | | |
|---|---|---|---|
| Contact rating of auxiliary contacts according to UL | | | A600 - P600 |

## Ambient conditions


Temperature

| | | | |
|---|---|---|---|
| Operating temperature | | | |
| | min | °C | -50 |
| | max | °C | 70 |
| Storage temperature | | | |
| | min | °C | -60 |
| | max | °C | 80 |
| Max altitude | | m | 3000 |


## Resistance & Protection

| | |
|---|---|
| Pollution degree | 3 |

## Dimensions

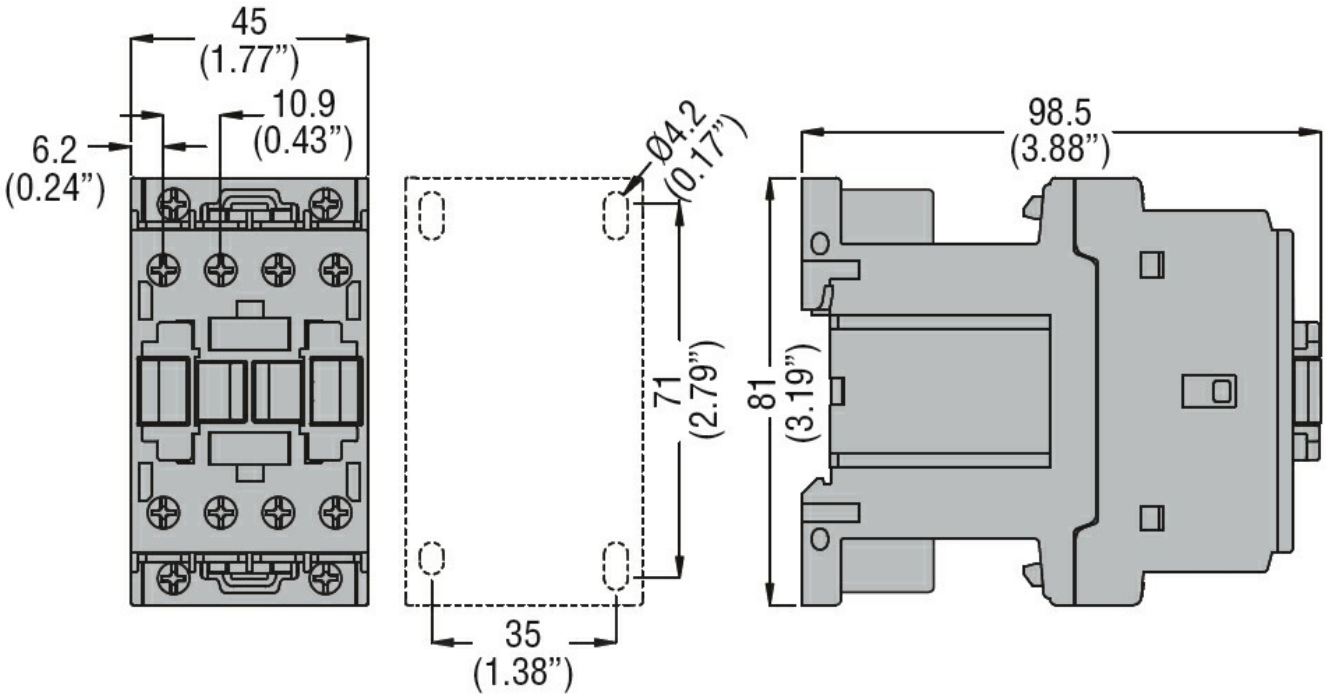


## Wiring diagrams

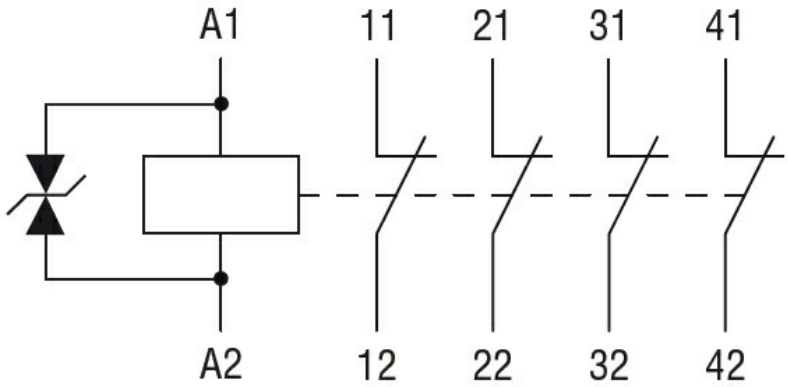


## Certifications and compliance

Compliance

| |
|---|
| CSA C22.2 n° 60947-1 |
| CSA C22.2 n° 60947-5-1 |
| IEC/EN 60947-1 |
| IEC/EN 60947-5-1 |
| UL 60947-1 |


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

| | |
|---|---|
| | UL 60947-5-1 |
| Certificates | |
| | CCC |
| | cULus |
| | EAC |

## ETIM classification

| | |
|---|---|
| ETIM 8.0 | EC000196 - Contactor relay |


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding