KBH1L11

LIMIT SWITCH, K SERIES, CERAMIC ROD LEVER, 1 BOTTOM CABLE ENTRY. DIMENSIONS TO EN 50047, PLASTIC BODY, CONTACTS 1NO+1NC SLOW ACTION. CERAMIC ROD



General characteristics

Material			
	Housing		Polymer thermoplastic
	Rod		Ceramic

Contact characteristics

Type of contact			1NO+1NC Slow action
Thermal current Ith		A	10
IEC/EN 60947-5-1 designation			A600 Q600
Rated insulation voltage Ui		V	690
Rated impulse withstand voltage Uimp		kV	6
Insulation class			II
Short-circuit protection with fuse		Class/A	10 gG/SC QUICK FUSE
Switching speed			
	min	m/s	0.5
	max	m/s	1.5
IEC Conventional free air thermal current Ith ≤ 40°C		A	10
Resistance per pole (average value)		mΩ	<10

Mechanical features

Operating head fixing			Locking bayonet insert
Operating torque			
		Ncm	3
		ozin	4.25
Tightening torque (Max)			
	Switch fixing		
		Nm	2.5
		lbin	22.1
	Contact terminals		
		Nm	0.8
		lbin	7
	Body lid screw fixing		
		Nm	0.8
		lbin	7
Conductor section			
	AWG/Kcmil		
	min		16
	max		14
	IEC		
	min	mm²	1.5
	max	mm²	2.5
Cable connection			Self-releasing screw terminal


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

KBH1L11

LIMIT SWITCH, K SERIES, CERAMIC ROD LEVER, 1 BOTTOM CABLE ENTRY. DIMENSIONS TO EN 50047, PLASTIC BODY, CONTACTS 1NO+1NC SLOW ACTION. CERAMIC ROD


Cable entry				M20 on the bottom
Operations				
Mechanical life			cycles	<10000000
Mechanical operation			cycles/h	3600
Ambient conditions				
Temperature				
	Operating temperature			
		min	°C	-25
		max	°C	+70
	Storage temperature			
		min	°C	-40
		max	°C	+70
Resistance & Protection				
IP degree				
		Terminals		IP20
		Body housing		IP65
Pollution degree				3

Dimensions

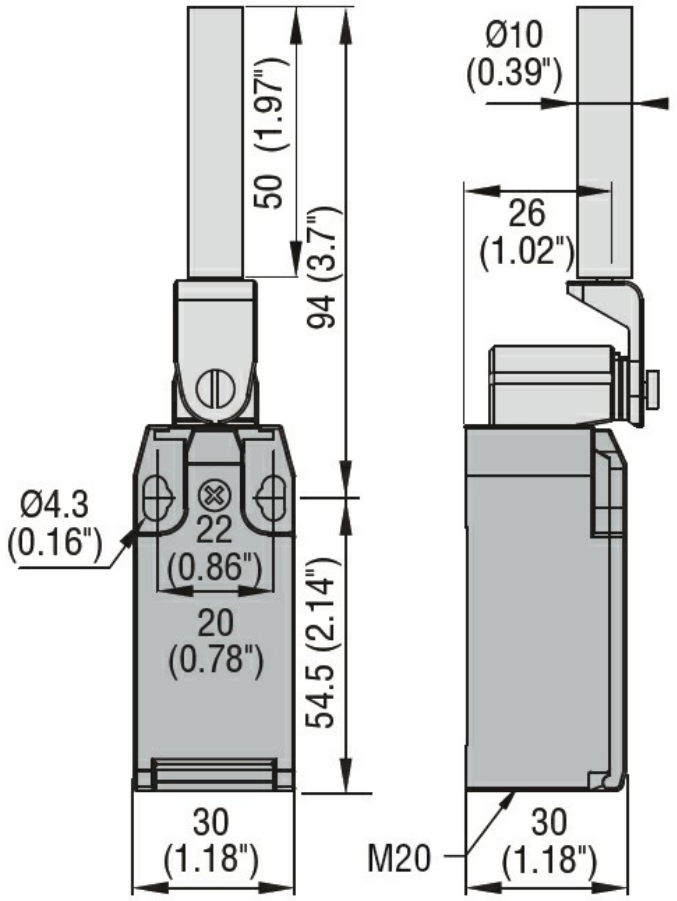

Wiring diagrams

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

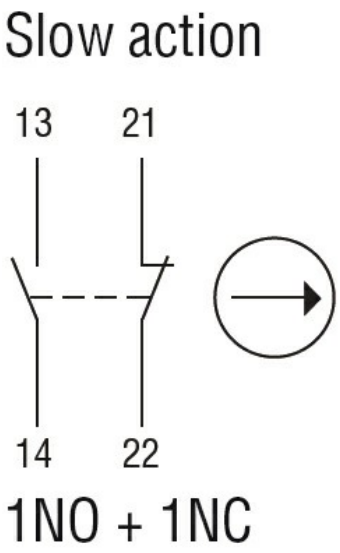

Certifications and compliance

Compliance	
	CSA C22.2 n° 14
	EN 50047
	IEC/EN 60204-1
	IEC/EN 60947-1
	IEC/EN 60947-5-1
	UL508
Certificates	
	CCC
	cULus
	EAC

ETIM classification

ETIM 8.0	EC000030 - End switch

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding