# LPSR1196

MECHANICAL RESET BUTTON, COMPLETE UNIT, SPRING RETURN Ø22MM PLATINUM SERIES METAL, FLUSH. ADJUSTABLE LENGTH 0...150MM/5.9IN, BLUE WITH "RESET" CAPTION




## General characteristics

| | |
|---|---|
| Colour | Blue |
| Type of positions | Mechanical reset button |
| Material | Aluminium and zinc alloy for metal parts and polyamide for plastic parts |
| IEC degree of protection | IP66, IP67 and IP69K |

## Mechanical features

| | | |
|---|---|---|
| Mechanical life | cycles | 5000000 |
| Fixing | | Without mounting adapter |
| Mounting adapter | | LPXAU120M |

## UL technical data


| | |
|---|---|
| UL degree of protection | Type1, 2, 3R, 4, 4X, 12, 12K |

## Ambient conditions

Temperature

| | | | |
|---|---|---|---|
| Operating temperature | | | |
| | min | °C | -25 |
| | max | °C | +70 |
| Storage temperature | | | |
| | min | °C | -40 |
| | max | °C | +85 |

## Dimensions

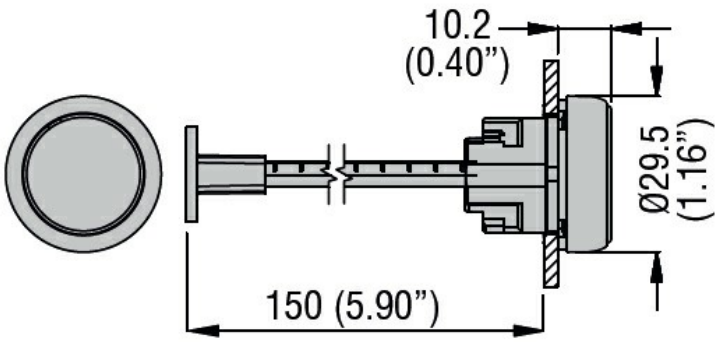


## Certifications and compliance

Compliance

| |
|---|
| CSA C22.2 n° 14 |
| IEC/EN/BS 60947-1 |
| IEC/EN/BS 60947-5-1 |
| UL508 |

Certificates


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

cULus

## ETIM classification

| | |
|---|---|
| ETIM 8.0 | EC000029 - Push-switch button |


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding