LTN50ML6

BLINKING OR STEADY LIGHT MODULE Ø50MM. INTEGRATED LED LAMP, BLUE



General characteristics

Diameter		mm - inch	50 / 1.97
Colour			Blue
IEC degree of protection			IP65
Power consumption		VA	1.2

Mechanical features


Weight		g	37

Ambient conditions

Temperature

	Operating temperature		
	min	°C	-30
	max	°C	+50

Dimensions

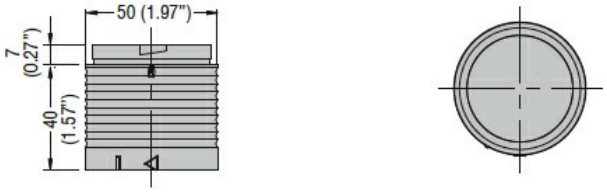

Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN/BS 60947-1
IEC/EN/BS 60947-5-1
UL508

Certificates

cULus

ETIM classification

ETIM 8.0	EC000232 - Optical module for signal tower

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding