LTN50P100

EXTENSION TUBE FOR Ø50MM SIGNAL TOWERS, METAL 100MM

General characteristics

Diameter		mm - inch	50 / 1.97
Material			Metal

Mechanical features


Weight		g	28

Ambient conditions

Temperature

	Operating temperature		
		min	°C -30
		max	°C +50

Dimensions

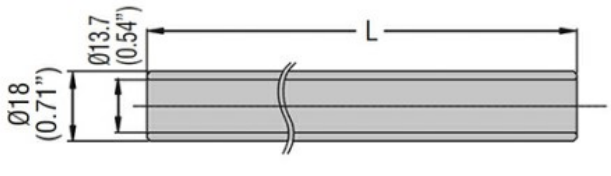

Type	L (mm/in)
LTP50P050	50 (1.97")
LTP50P100	100 (3.94")
LTP50P250	250 (9.84")
LTP50P400	400 (15.75")

Certifications and compliance

Compliance

- CSA C22.2 n° 14
- IEC/EN/BS 60947-1
- IEC/EN/BS 60947-5-1
- UL508

Certificates

- cULus

ETIM classification

ETIM 8.0	EC001155 - Tube for signal tower

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding