# LTN70P050T

EXTENSION TUBE FOR Ø70MM SIGNAL TOWERS, METAL 50MM WITH THREADED END



## General characteristics

| | | | |
|---|---|---|---|
| Diameter | | mm - inch | 70 / 2.75 |
| Material | | | Metal |

## Mechanical features


| | | | |
|---|---|---|---|
| Weight | | g | 39 |

## Ambient conditions

Temperature

| | | | |
|---|---|---|---|
| | Operating temperature | | |
| | | min | °C -30 |
| | | max | °C +50 |

## Dimensions

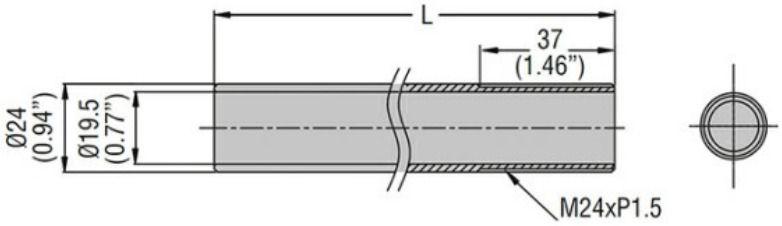


| Type | L (mm/in) |
|---|---|
| LTP70P050T | 50 (1.97") |
| LTP70P100T | 100 (3.94") |
| LTP70P250T | 250 (9.84") |
| LTP70P400T | 400 (15.75") |

## Certifications and compliance

Compliance

| | |
|---|---|
| CSA C22.2 n° 14 | |
| IEC/EN/BS 60947-1 | |
| IEC/EN/BS 60947-5-1 | |
| UL508 | |

Certificates

| | |
|---|---|
| cULus | |

## ETIM classification

| | |
|---|---|
| ETIM 8.0 | EC001155 - Tube for signal tower |


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding