LTN50P100T

EXTENSION TUBE FOR Ø50MM SIGNAL TOWERS, METAL 100MM WITH THREADED END



General characteristics

Diameter		mm - inch	50 / 1.97
Material			Metal

Mechanical features


Weight		g	27

Ambient conditions

Temperature

	Operating temperature		
		min	°C -30
		max	°C +50

Dimensions

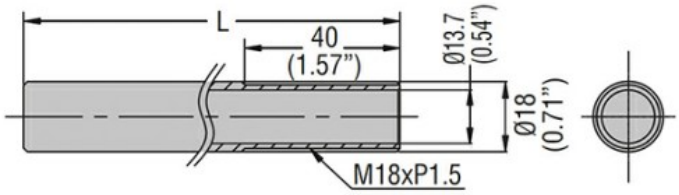

Type	L (mm/in)
LTP50P050T	50 (1.97")
LTP50P100T	100 (3.94")
LTP50P250T	250 (9.84")
LTP50P400T	400 (15.75")

Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN/BS 60947-1
IEC/EN/BS 60947-5-1
UL508

Certificates

cULus

ETIM classification

ETIM 8.0	EC001155 - Tube for signal tower

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding