
Artemide

PRODUCT DATA SHEET

Everything 35

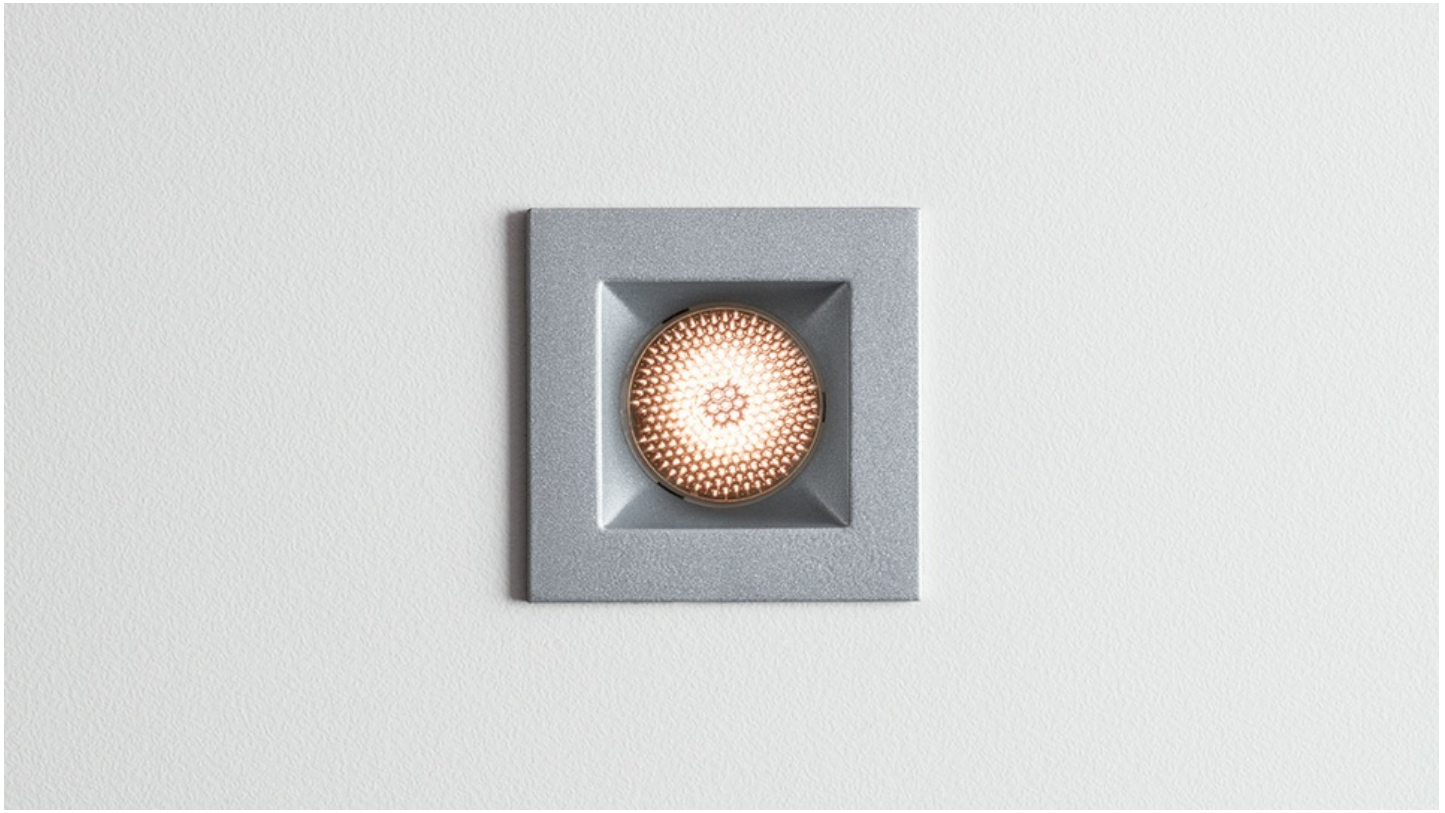

Everything is an innovative range of professional recessed light fittings created to deliver a high lighting performance, with an eye on energy saving and excellent visual comfort.A complete, flexible product range, extremely versatile in its many applications and able to meet challenging lighting performance criteria.


Black ● Silver ● White ○

LED Square

IP20



W	Weight	Hole In False Ceiling	Beam	Luminous Flux (lm)	Color	Code
1,4W	0.10Kg	2.9x2.9	14°	105lm	●	NL4203110W004
					◍	NL4203110W002
					○	NL4203110W006
				98lm	●	NL4203110K004
					◍	NL4203110K002
					○	NL4203110K006
			24°	105lm	●	NL4203125W004
					◍	NL4203125W002
					○	NL4203125W006
				98lm	●	NL4203125K004
					◍	NL4203125K002
					○	NL4203125K006




LED Round

IP20




W	Weight	Hole In False Ceiling	Beam	Luminous Flux (lm)	Color	Code
1,4W	0.10Kg		14°	105lm	●	NL4203010W004
					◍	NL4203010W002
					○	NL4203010W006
				98lm	●	NL4203010K004
					◍	NL4203010K002
					○	NL4203010K006
			24°	105lm	●	NL4203025W004
					◍	NL4203025W002
					○	NL4203025W006
				98lm	●	NL4203125K004
					◍	NL4203125K002
					○	NL4203025K006



LED


Everything 35 LED 14°	LED		luminaire	
Power	1,4W	1,4W	1,4W	1,4W
Flux	126lm	134lm	98lm	105lm
CCT	3000K	4000K	3000K	4000K
CRI	80			
Color Tolerance	4SDCM			
Service Life	L70(6K) > 39000h			
Beam			14°	14°
Efficiency			78%	78%
Efficacy	90lm/W	60lm/W	70lm/W	75lm/W

1,4 W



3000 K		α =14°	4000 K		α =14°
H m	Ø m	E lux	H m	Ø m	E lux
0,5	0,12	4623	0,5	0,12	4953
1,0	0,24	1156	1,0	0,24	1238
1,5	0,36	514	1,5	0,36	550
2,0	0,48	289	2,0	0,48	310
2,5	0,60	185	2,5	0,60	198
3,0	0,72	128	3,0	0,72	138

Everything 35 LED 24°	LED		luminaire	
Power	1,4W	1,4W	1,4W	1,4W
Flux	126lm	134lm	98lm	105lm
CCT	3000K	4000K	3000K	4000K
CRI	80			
Color Tolerance	4SDCM			
Service Life	L70(6K) > 39000h			
Beam			24°	24°
Efficiency			78%	78%
Efficacy	90lm/W	96lm/W	70lm/W	75lm/W



1,4 W	3000 K		α =24°	4000 K		α =24°
	H m	Ø m	E lux	H m	Ø m	E lux
	0,5	0,21	1878	0,5	0,21	2012
	1,0	0,42	470	1,0	0,42	503
	1,5	0,63	209	1,5	0,63	224
	2,0	0,84	117	2,0	0,84	126
	2,5	1,04	75	2,5	1,04	80
	3,0	1,25	52	3,0	1,25	56

Accessories

		Code
NO IMAGE AVAILABLE	ALIMENT. 8W 500mA (INDIP.)	NL10941
NO IMAGE AVAILABLE	ALIMENT. 20W 500mA (indip.)	NL19034

Designers



Ernesto Gismondi