LDX02

Version	Fail locked(the bolt is locked when the current is off)
Operation Voltage	DC 12V
Working Current	12V DC 2000mA
Standby Current	DC 12V
Holding Force	300Lbs/150KG
Face place material	Chrome-plated steel housing
Solenoid	Rated for intermittence use
Cycle Rating	More than 1,000,000 times
Protection Class	IP20
Signal Output	Lock status Output,NC/COM
Working Temperature	-20ºC ~ +60ºC
Suitable for	Cabinets, Delivery locker, Fresh freezer,Drawers and Steel furniture.
Dimensions(L x W x H)	80mmL×59mmW×13mmH
Weight in kg	0.22kg

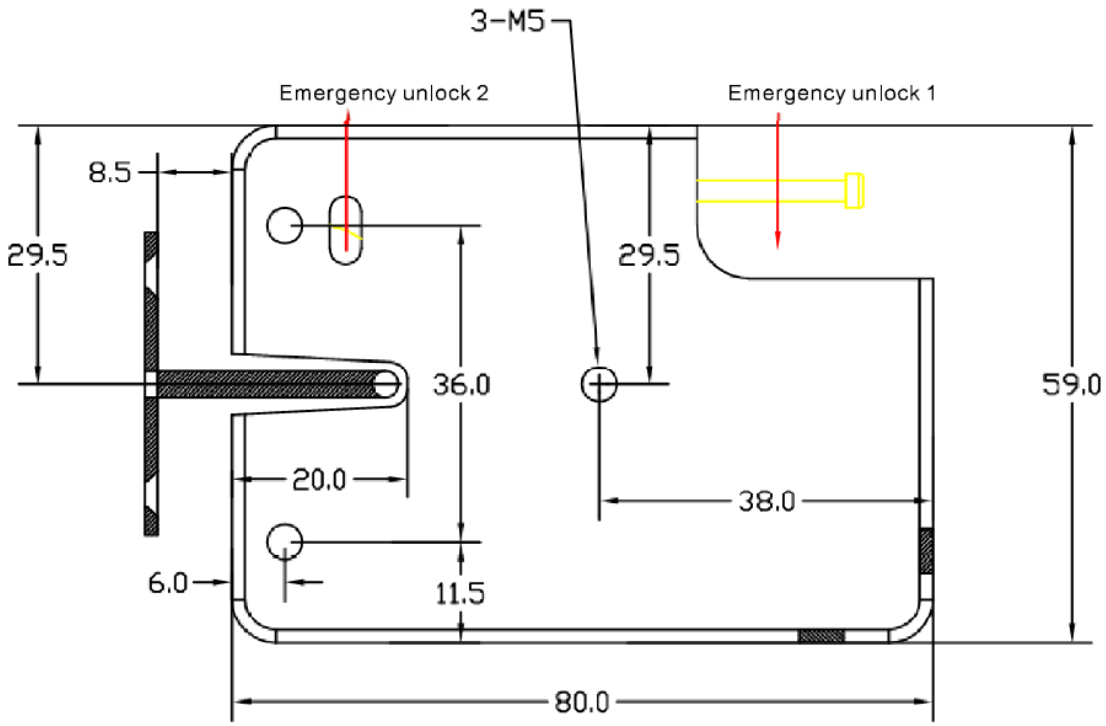

CDVI Italia Srl sede legale e commerciale - Via I°Maggio 9/11 – 28040 BORGO TICINO (NO) - Italy
Tel. +39 0321-90573 - Fax +39 0321-908018 - Email info@cdvi.it - www.cdvi.it
C.F. P.Iva 01814740039 - Iscrizione REA 198525 - Capitale Sociale I.V. Euro 99.000,00