
Scheinwerfer | 176-264 V AC /176-280 V DC
16 x powerLEDs 27 W DC - 30 W AC | CRI 90
C00476BBWAW







Technische Daten	
Typ	Schiene
Installationsposition	Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	powerLEDs
Optik	Adjustable Wall Washer
Light emission direction	frontal
Lampe Nennleistung	27 W DC
Gesamtleistung	30 W
Lichtstrom (Lichtquelle)	3540 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	176 - 264 V AC
Frequency	50 - 60 Hz
Ähnlichste Farbtemperatur / Tone	3000 K
Farbwiedergabeindex	90 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	2
IP	IP20
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	DALI-2 - PUSH DIM
Schwenkbarkeit	Orientabile
Gesamtwinkel (vertikale Ebene)	90 °
Gesamtwinkel (horizontale Ebene)	360 °
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Nein
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	1.152 Kg
Schutz vor elektrostatischen Entladungen	Ja
Schutz vor Stoßspannungen	2 KV

Oberfläche Oberfläche Gehäuse	
Material	Stranggepresstes Aluminium EN AB - 46100
Farbe	Text black RAL9005
Bearbeitungstyp	Pulverbeschichtung mit duroplastischen Pulvern

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Scheinwerfer | 176-264 V AC /176-280 V DC | 16 x powerLEDs 27 W DC - 30 W AC | CRI 90

C00476BBWAW

Single emission projectors for indoor application. The warm white LED light source with a adjustable wall washer light distribution is composed of 16 powerled LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 3540 lm, with a 131.1 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a text black ral9005 finish, processed by means of powder coating with thermosetting powders.

The ingress protection degree is IP20; the total weight is of 1.152 kg.

The total absorbed power is 30 W

The device features protection class II and can be ceiling-mounted.


Compliant with the EN 60598-1 standard and its specific provisions.


Energieeffizienzklasse
Dieses Produkt enthält 2 Lichtquellen der Energieeffizienzklasse F.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	28 %
Lichtstrom (Lichtquelle)	3540 lm
Leuchten Lichtstrom	1005 lm
Consumption	30 W
Leuchten Lichtausbeute	33 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	40°C

LED Life / Failure Ratio
L70 B10 C0 363000h (at Tj 65 Ta 25)
L80 B10 C0 237566h (at Tj 65 Ta 25)
L90 B10 C0 151000h (at Tj 65 Ta 25)

OPTICAL	
Optik C0/C180	63°
Light distribution simmetry	Asymmetrical

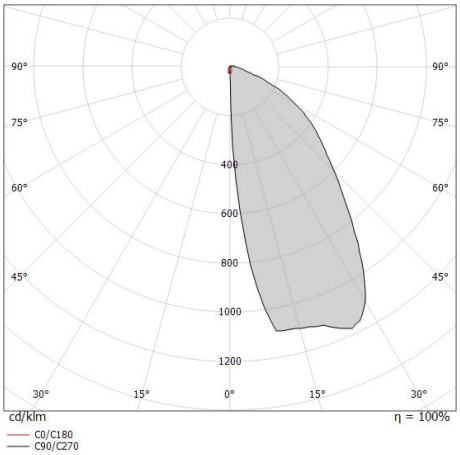

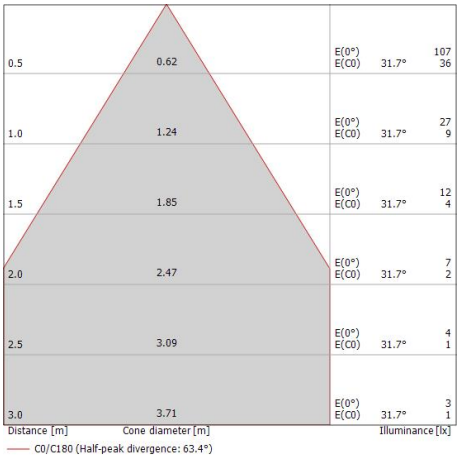

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Scheinwerfer | 176-264 V AC /176-280 V DC | 16 x powerLEDs 27 W DC - 30 W AC | CRI 90

C00476BBWAW

Single emission projectors for indoor application. The warm white LED light source with a adjustable wall washer light distribution is composed of 16 powerled LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 3540 lm, with a 131.1 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a text black ral9005 finish, processed by means of powder coating with thermosetting powders.

The ingress protection degree is IP20; the total weight is of 1.152 kg.

The total absorbed power is 30 W

The device features protection class II and can be ceiling-mounted.


Compliant with the EN 60598-1 standard and its specific provisions.


Energieeffizienzklasse
Dieses Produkt enthält 2 Lichtquellen der Energieeffizienzklasse F.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	34 %
Lichtstrom (Lichtquelle)	3540 lm
Leuchten Lichtstrom	1238 lm
Consumption	30 W
Leuchten Lichtausbeute	41 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	40°C

LED Life / Failure Ratio
L70 B10 C0 363000h (at Tj 65 Ta 25)
L80 B10 C0 237566h (at Tj 65 Ta 25)
L90 B10 C0 151000h (at Tj 65 Ta 25)

OPTICAL	
Optik C0/C180	57°
Light distribution simmetry	Asymmetrical

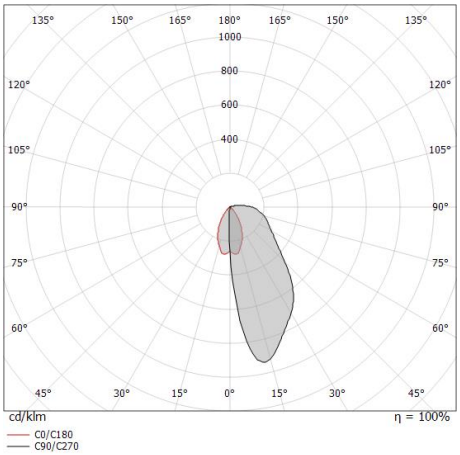


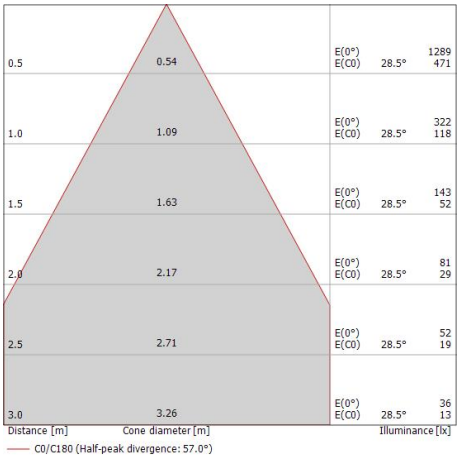

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Optus_Ww | Projectors | Accessories
C00476BBWAW






Schiene
Länge: 1000mm; Typ Schiene: Standard.
Material:Aluminium, farbe:Text white RAL9003, bearbeitungstyp :Lackierung.

Code
83336






Schiene
Länge: 2000mm; Typ Schiene: Standard.
Material:Aluminium, farbe:Text white RAL9003, bearbeitungstyp :Lackierung.


Code
83337






Schiene
Länge: 3000mm; Typ Schiene: Standard.
Material:Aluminium, farbe:Text white RAL9003, bearbeitungstyp :Lackierung.


Code
83338






Schiene
Länge: 1000mm; Typ Schiene: Standard.
Material:Aluminium, farbe:Text black RAL9005, bearbeitungstyp :Lackierung.


Code
83339






Schiene
Länge: 2000mm; Typ Schiene: Standard.
Material:Aluminium, farbe:Text black RAL9005, bearbeitungstyp :Lackierung.

Code
83340






Schiene
Länge: 3000mm; Typ Schiene: Standard.
Material:Aluminium, farbe:Text black RAL9005, bearbeitungstyp :Lackierung.

Code
83341






Schiene
Länge: 1000mm; Typ Schiene: Standard.
Material:Aluminium, farbe:Text white RAL9003, bearbeitungstyp :Lackierung.

Code
80990






Schiene
Länge: 2000mm; Typ Schiene: Standard.
Material:Aluminium, farbe:Text white RAL9003, bearbeitungstyp :Lackierung.

Code
80991

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Optus_Ww | Projectors | Accessories
C00476BBWAW






Schiene
Länge: 3000mm; Typ Schiene: Standard.
Material:Aluminium, farbe:Text white RAL9003, bearbeitungstyp :Lackierung.

Code
80992






Schiene
Länge: 1000mm; Typ Schiene: Standard.
Material:Aluminium, farbe:Text black RAL9005, bearbeitungstyp :Lackierung.

Code
80993






Schiene
Länge: 2000mm; Typ Schiene: Standard.
Material:Aluminium, farbe:Text black RAL9005, bearbeitungstyp :Lackierung.

Code
80994






Schiene
Länge: 3000mm; Typ Schiene: Standard.
Material:Aluminium, farbe:Text black RAL9005, bearbeitungstyp :Lackierung.

Code
80995






Stromversorgung
Material:PC, farbe:Weiß.

Code
81033






Stromversorgung
Material:PC, farbe:Black.

Code
81034






Stromversorgung
Material:PC, farbe:Weiß.

Code
81036





Stromversorgung
Material:PC, farbe:Black.

Code
81037

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Optus_Ww | Projectors | Accessories
C00476BBWAW




Kabelverbindung
Typ linear.
Material:PC, farbe:Weiß.

Code
81042




Kabelverbindung
Typ linear.
Material:PC, farbe:Black.

Code
81043





Kabelverbindung
Typ flexible curve.
Material:PC, farbe:Weiß.

Code
81066





Kabelverbindung
Typ flexible curve.
Material:PC, farbe:Black.

Code
81067


Kabelverbindung
Typ linear.
Material:PC, farbe:Weiß.

Code
81051


Kabelverbindung
Typ linear.
Material:PC, farbe:Black.

Code
81052

Kabelverbindung
Typ linear.
Material:PC, farbe:Weiß.

Code
81054

Kabelverbindung
Typ linear.
Material:PC, farbe:Black.

Code
81055

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Optus_Ww | Projectors | Accessories
C00476BBWAW



Endkappe
Material:PC, farbe:Weiß.


Code
80999



Endkappe
Material:PC, farbe:Black.

Code
81000






Kabelverbindung
Typ linear.
Material:PC, farbe:Weiß.

Code
81039






Kabelverbindung
Typ linear.
Material:PC, farbe:Black.

Code
81040






Kabelverbindung
Typ linear.
Material:PC, farbe:Weiß.

Code
81045






Kabelverbindung
Typ linear.
Material:PC, farbe:Black.

Code
81046






Kabelverbindung
Typ linear.
Material:PC, farbe:Weiß.

Code
81048







Kabelverbindung
Typ linear.
Material:PC, farbe:Black.

Code
81049

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.


Optus_Ww | Projectors | Accessories
C00476BBWAW






Kabelverbindung
Typ linear.
Material:PC, farbe:Weiß.

Code
81063






Kabelverbindung
Typ linear.
Material:PC, farbe:Black.

Code
81064






Kabelverbindung
Typ linear.
Material:PC, farbe:Weiß.

Code
81057






Kabelverbindung
Typ linear.
Material:PC, farbe:Black.

Code
81058






Kabelverbindung
Typ linear.
Material:PC, farbe:Weiß.

Code
81060





Kabelverbindung
Typ linear.
Material:PC, farbe:Black.


Code
81061



Endkappe
Material:PC, farbe:Weiß.

Code
81002





Endkappe
Material:PC, farbe:Black.

Code
81003

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.


Optus_Ww | Projectors | Accessories
C00476BBWAW



Deckenrosette - Weißes Aufhängungsset 1,5 m + Halterung (9000-KIT5-1,5-W)
Einschließlich Driver: Nein.
Material:Kunststoff, farbe:Weiß.

Code
81012






Deckenrosette - Schwarzes Aufhängungsset 1,5 m + Halterung (9000-KIT5-1,5-B)
Einschließlich Driver: Nein.
Material:Kunststoff, farbe:Black.

Code
81014





Deckenrosette - Weißes Aufhängungsset 5 m + Halterung (9000-KIT5-5-W)
Einschließlich Driver: Nein.
Material:Kunststoff, farbe:Weiß.

Code
81013



Deckenrosette - Schwarzes Aufhängungsset 5 m + Halterung (9000-KIT5-5-B)
Einschließlich Driver: Nein.
Material:Kunststoff, farbe:Black.

Code
81015



Hängeleuchten
Material:Kunststoff, farbe:Weiß.

Code
81021



Hängeleuchten
Material:Kunststoff, farbe:Black.

Code
81022





Klammer
L=35mm, H=14mm, D=24mm.
Material:Aluminium, farbe:Polished aluminium.

Code
81086





Klammer
L=35mm, H=14mm, D=24mm.
Material:Aluminium, farbe:Weiß, bearbeitungstyp :Lackierung.

Code
81087

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Optus_Ww | Projectors | Accessories
C00476BBWAW





Klammer
L=35mm, H=14mm, D=24mm.
Material:Aluminium, farbe:Text black RAL9005, bearbeitungstyp :Lackierung.

Code
81088





Drahtabdeckung
Material:PC, farbe:Weiß.

Code
81069






Drahtabdeckung
Material:PC, farbe:Black.

Code
81070


Drahtabdeckung
Material:PC, farbe:Weiß.

Code
81075

Drahtabdeckung
Material:PC, farbe:Black.

Code
81076





Drahtabdeckung
Material:PC, farbe:Weiß.

Code
81081




Drahtabdeckung
Material:PC, farbe:Black.

Code
81082





Code
81091

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Optus_Ww | Projectors | Accessories
C00476BBWAW





Code
81093



Werkzeug - Schneidezange S?9000/T
Material:Gumi, farbe:Black.


Code
81005



Hängeleuchten
Material:Kunststoff, farbe:Weiß.

Code
81006





Hängeleuchten
Material:Kunststoff, farbe:Black.


Code
81008



Hängeleuchten
Material:Kunststoff, farbe:Weiß.

Code
81007





Hängeleuchten
Material:Kunststoff, farbe:Black.

Code
81009



Hängeleuchten
Material:Kunststoff, farbe:Weiß.

Code
81018



Hängeleuchten
Material:Kunststoff, farbe:Black.

Code
81019

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Optus_Ww | Projectors | Accessories
C00476BBWAW





Klammer
L=180mm, H=24mm, D=26mm.
Material:Aluminium, farbe:Anodised aluminium, bearbeitungstyp :Eloxierung.

Code
81024






Klammer
L=180mm, H=24mm, D=20mm.
Material:Aluminium, farbe:Weiß RAL 9010, bearbeitungstyp :Lackierung.

Code
81025





Klammer
L=180mm, H=24mm, D=20mm.
Material:Aluminium, farbe:Schwarz RAL 9005, bearbeitungstyp :Lackierung.


Code
81026





Drahtabdeckung
Material:PC, farbe:Weiß.


Code
81072






Drahtabdeckung
Material:PC, farbe:Black.


Code
81073






Drahtabdeckung
Material:PC, farbe:Weiß.

Code
81078





Drahtabdeckung
Material:PC, farbe:Black.

Code
81079

Drahtabdeckung
Material:Weiß.

Code
83249

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.


Optus_Ww | Projectors | Accessories
C00476BBWAW



Drahtabdeckung
Material:Schwarz, farbe:Black.

Code
83250






Endkappe
Material:Weiß.

Code
81084






Endkappe
Material:Schwarz, farbe:Black.


Code
81085





Code
81094





Code
81095

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.